




Live in the **Comfort Zone**



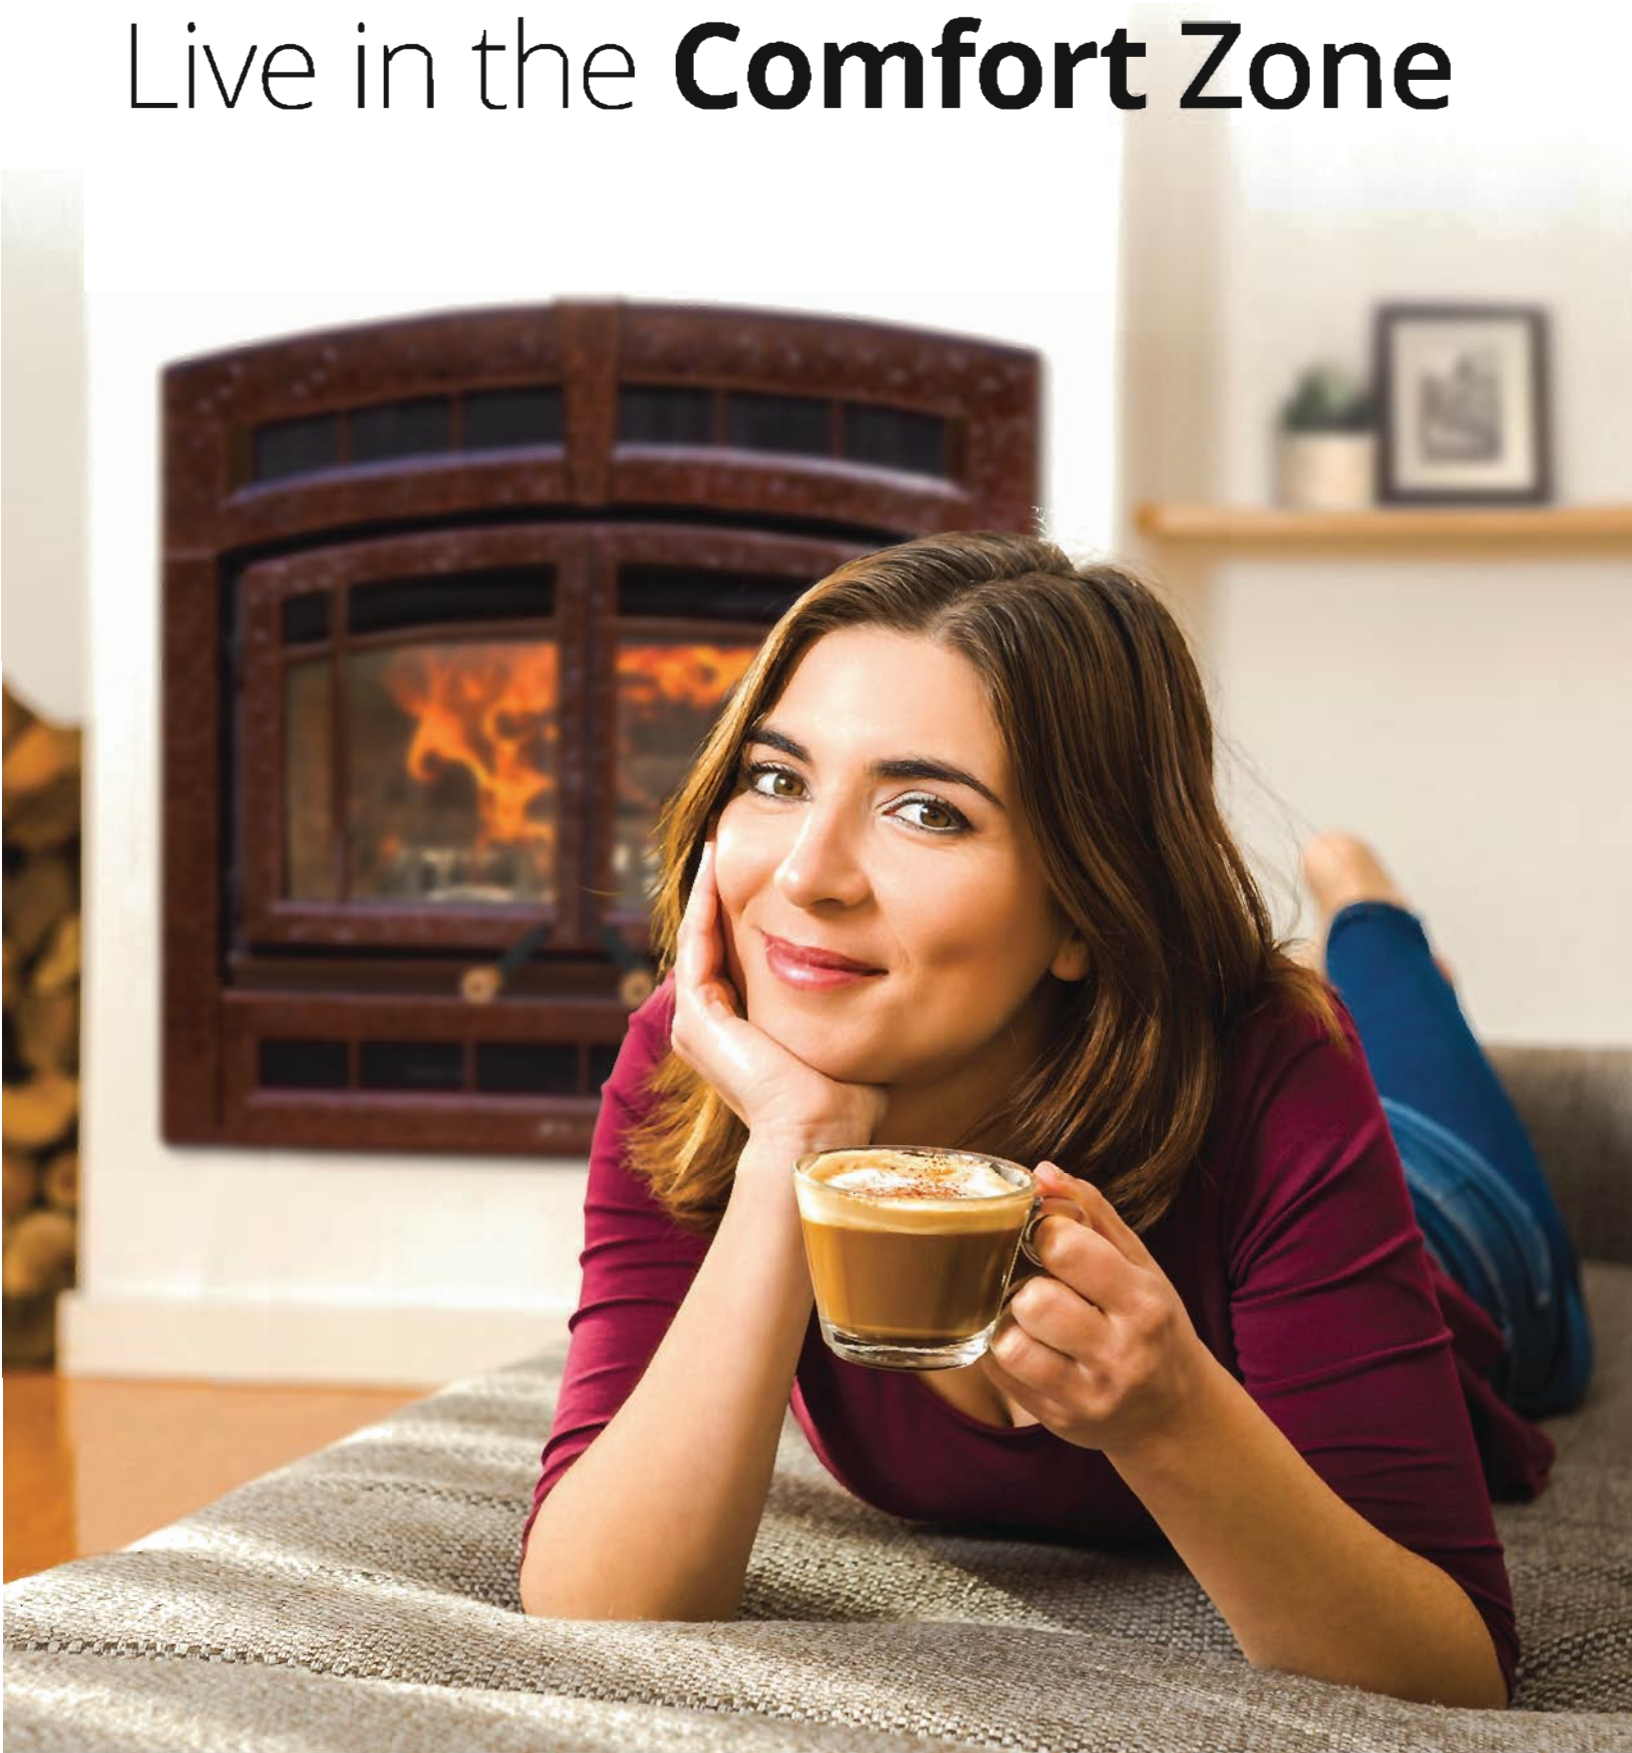

HearthStone is proud to be a Vermont company.

Located in Morrisville, Vermont, we know about keeping your home warm and comfortable in all seasons.

For more than 39 years, our dedicated Vermont craftsmen have been committed to building quality stoves. We handcraft each HearthStone to meet the highest standards using the finest materials and the most advanced heating technology. As proof, every HearthStone soapstone stove is signed by the stove builder.

The HearthStone brand is an assurance – a guarantee that your appliance is built in the rich tradition of our company, and will serve you faithfully for years to come.

Thanks for making HearthStone part of your life.





WOOD.....	4
Equinox	6
Mansfield.....	8
Heritage.....	10
Phoenix.....	12
Homestead.....	14
Castleton.....	16
Tribute.....	18
Manchester.....	20
Shelburne.....	22
Craftsbury.....	24
Clydesdale.....	26
Morgan.....	28
WFP-75 Montgomery.....	30
WFP-100 Montgomery.....	32
HASE.....	34
Bari.....	36
Tula.....	38
Eclipse.....	40
COOK.....	42
Deva.....	44
GAS.....	46
Waitsfield DX.....	48
Bristol DX.....	50
Champlain.....	52
Stowe.....	54
ACCESSORIES.....	56
SPECIFICATIONS.....	58

Live in the **Comfort Zone**

There is nothing quite like sitting by a wood fire.


Every HearthStone wood burning product is a beautiful piece of furniture that will complement the charm of your home and provide a cozy, comfortable place to relax with family and friends.

Our stoves are built using soapstone. Soapstone is a natural material which absorbs the high heat of a fire, then radiates a gentle heat into the room. This means your home stays at a comfortable temperature, in the Comfort Zone.



heatlife™

HearthStone wood stoves stay warmer longer, keeping your home in the comfort zone.

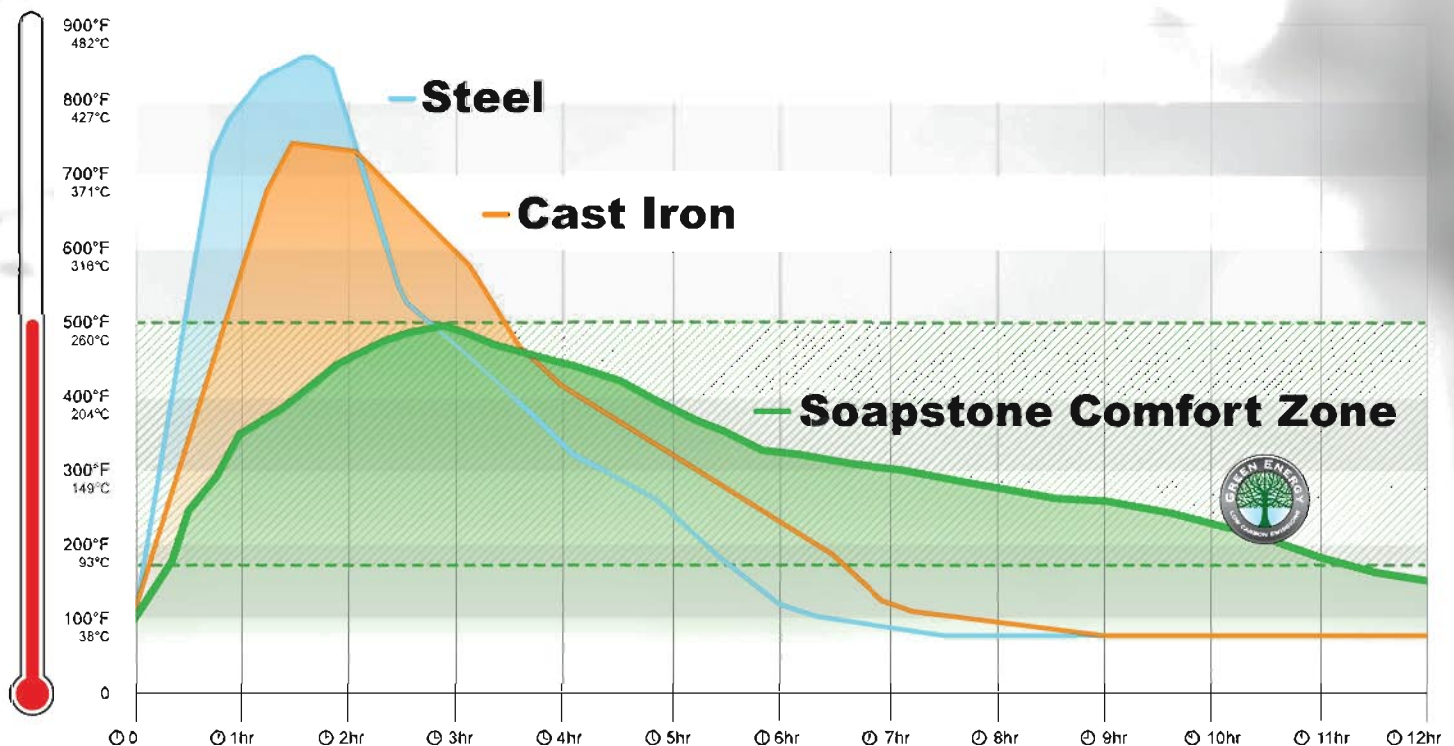

HeatLife™ measures the total hours of usable heat from a single load of wood. HearthStone wood stoves use soapstone to retain heat and deliver consistent warmth long after the fire goes out, keeping your home in the comfort zone. The combination of combustion technology with the HeatLife™ of soapstone means you're using less wood. Not only is your home warm and comfortable, but you're saving money and heating efficiently.



Our Green Energy Promise

HearthStone is committed to providing heating solutions which are renewable, carbon neutral, and clean.

All of our wood stoves use modern, low emission combustion technology. They exceed even the strictest EPA guidelines, so you can be sure they burn clean.

HearthStone's Green Energy promise is a promise for the future. By choosing sustainable heating solutions, we choose to protect our environment for future generations.

A tree decomposing in the forest emits the same amount of carbon dioxide as burning that same tree in an efficient burning HearthStone wood stove. Heating with wood is carbon-neutral. When you choose to heat with wood, you are choosing a local, renewable resource, using less fossil fuel and decreasing your carbon footprint.

Our Green Energy seal is a reminder of HearthStone's Green Energy promise.



Clean Burning Technology

At HearthStone, we believe that your stove should always burn clean.

We use a double combustion system that burns the wood twice. The wood is burned at the bottom of the stove and the gases from the wood are burned at the top of the stove. The result is clean and efficient combustion.

Our stoves are very easy to operate. We use a passive, self-regulating system which ensures your HearthStone burns cleanly and effectively on any setting.

With one lever you control the burn rate. Turn your stove to high and stoke a big fire. Turn it down to lower the fire once your home is warm. Turn it all the way to low to keep a fire burning overnight.

Equinox WOOD STOVE



EQUINOX MODEL 8000 MATTE BLACK + SOAPSTONE WITH LEFT SIDE DOOR


A Powerhouse to Heat the Most Generous Living Spaces






FINISH OPTIONS:



Painted Matte Black

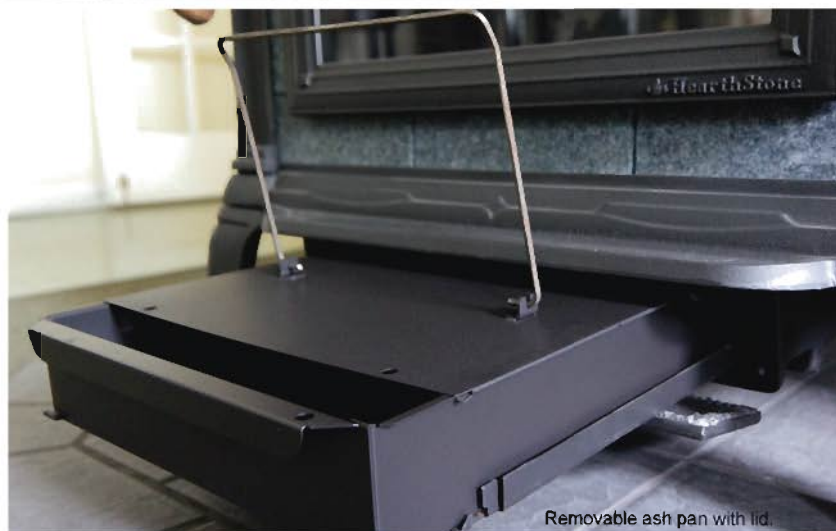

Removable ash pan with lid

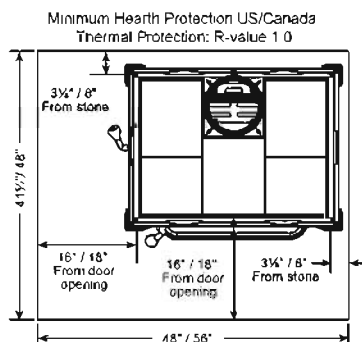

Minimum Hearth Protection US/Canada
Thermal Protection: R-value 1.0

EQUINOX 8000 FEATURES AND BENEFITS

- Right or Left Side Load Door – Flexible installation
- Oven-Style Side Load Door – Helps keep ashes in firebox
- Top or Rear Flue Exit – Flexible installation
- Single Lever Stove Control – Easy operation, consistent performance
- Secondary Burn Combustion System – Clean burning, efficient, reduces creosote build-up
- Ash Pan – Easy to clean, easily accessible

SPECIFICATIONS

Heats up to	3,500 sq ft
Firebox Capacity	4.0 cu ft
BTU	Up to 120,000
EPA Certified	3.1 g/hr
Efficiency	78% LHV, 72% HHV
Burn Time	Up to 12 hours
HeatLife	Up to 16 hours
Maximum Log Length	25" Left-Right, 20" Front-Back
Flue Exit & Diameter	Top or Rear - 8"
Ash Pan	Included
Side Load Door	Choose Left or Right
Actual Weight	689 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES

Side Door Lock Kit	90-70200
Convection Blower	90-57502
Rear Heat Shield	90-68000
Outside Air Adapter	93-53500
Spark Screen	93-69000

CLEARANCES TO COMBUSTIBLE MATERIALS

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	21"	19" *
B	21"	6"
C	26 3/4"	11 3/4"
D	15"	13 1/2" *
E	30 3/8"	28 7/8" *

* Non-door side -or- locked side door

Mansfield

WOOD STOVE



MANSFIELD MODEL 8012 MATTE BLACK + SOAPSTONE

Relaxed Good Looks that Deliver Lasting Whole-House Warmth



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel

MANSFIELD 8012 FEATURES AND BENEFITS

- **Deep Firebox** – Easy to load front-to-back, and side-to-side
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible

SPECIFICATIONS


Heats up to	2,500 sq ft
Firebox Capacity	3.2 cu ft
BTU	Up to 80,000
EPA Certified	2.8 g/hr
Efficiency	72% LHV, 67% HHV
Burn Time	Up to 10 hours
HeatLife	Up to 14 hours
Maximum Log Length	21" Left-Right, 19" Front-Back
Flue Exit & Diameter	Top - 6"
Ash Pan	Included
Outside Air Adapter	Included
Actual Weight	550 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES


Convection Blower	90-57000
Rear Heat Shield	90-57200



Mansfield featured in Brown Majolica Enamel, shown with soapstone steamer (90-99112).

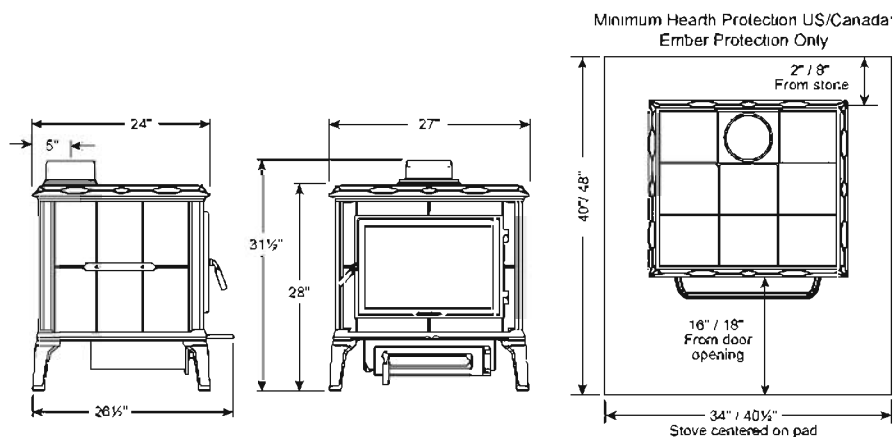

CLEARANCES TO COMBUSTIBLE MATERIALS

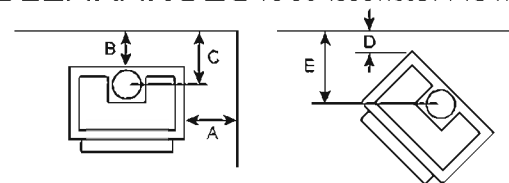

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	18"	18"
B	19"	8"
C	24"	13"
D	14"	14"
E	27"	27"

Heritage

WOOD STOVE



HERITAGE MODEL 8023 MATTE BLACK + SOAPSTONE WITH LEFT SIDE DOOR

Our Signature Product, the Heritage Delivers



Heritage featured in Brown Majolica Enamel

FINISH OPTIONS:



Matte Black




Brown Majolica Enamel



Seafoam Majolica Enamel





Black High-Gloss Enamel

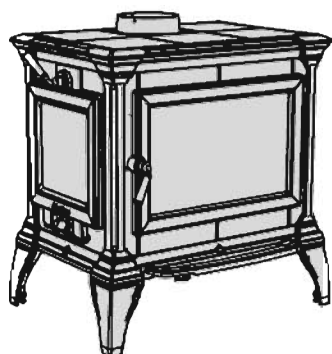


Left side load - 8023L



Right side load - 8023R

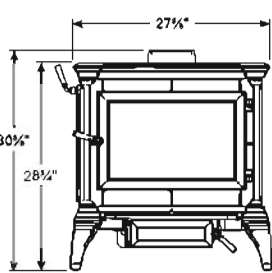

Shown with optional ash pan

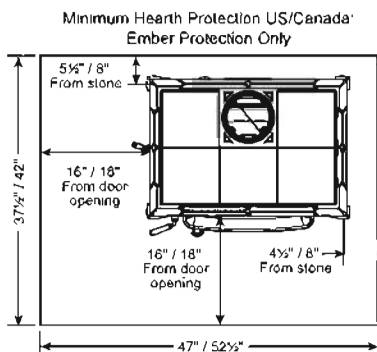

Minimum Hearth Protection US/Canada
Ember Protection Only

HERITAGE 8023 FEATURES AND BENEFITS

- **Left Side Load Or Right Side Load** – Front door coordinated with side door for flexible installation
- **Oven-Style Side Load Door** – Helps keep ashes in firebox
- **Top Or Rear Flue Exit** – Flexible installation
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Optional Ash Pan** – Easy to clean, easily accessible

SPECIFICATIONS

Heats up to.....	2,000 sq ft
Firebox Capacity.....	2.5 cu ft
BTU.....	Up to 60,000
EPA Certified.....	2.0 g/hr
Efficiency.....	75% LHV, 70% HHV
Burn Time.....	Up to 8 hours
HeatLife.....	Up to 12 hours
Maximum Log Length.....	21"
Flue Exit & Diameter.....	Top or Rear - 6"
Side Load Door.....	Choose Left or Right
Actual Weight.....	550 lbs.
Alcove Certified.....	Yes
Mobile Home Certified.....	Yes

ACCESSORIES

Ash Pan.....	90-57220
Convection Blower.....	90-57210
Rear Heat Shield.....	90-68210
Outside Air Adapter.....	90-53220

CLEARANCES TO COMBUSTIBLE MATERIALS

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	17"	15" *
B	16"	7"
C	21"	12"
D	12"	11" *
E	25 1/2"	24 1/2" *

* Non-door side -or- locked side door

Phoenix WOOD STOVE



PHOENIX MODEL 8612 MATTE BLACK + SOAPSTONE

Quick Heat of Cast Iron, Radiant Heat of Soapstone



FINISH OPTIONS:




Matte Black




Brown Majolica Enamel



Phoenix featured with Brown Majolica Enamel finish



Note: Shown with 45° elbow stovepipe, not included with stove

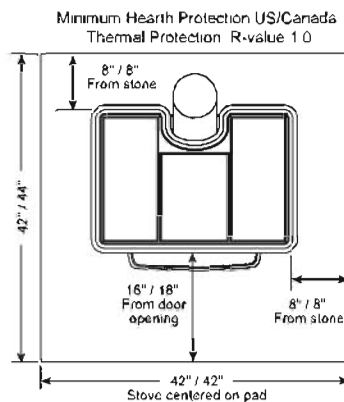

PHOENIX 8612 FEATURES AND BENEFITS

- **Cast Iron And Soapstone Hybrid Construction** – Quick and lasting heat
- **45 Degree Flue Collar** – Flexible installation (freestanding or hearthmount stove)
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	2,000 sq ft
Firebox Capacity	2.2 cu ft
BTU	Up to 55,000
EPA Certified	2.5 g/hr
Efficiency	75% LHV, 70% HHV
Burn Time	Up to 8 hours
HeatLife	Up to 12 hours
Maximum Log Length	21"
Flue Exit & Diameter	45° collar - 6"
Ash Pan	Included
Actual Weight	425 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES

Rear Heat Shield	96-58602
Outside Air Adapter	96-56322

CLEARANCES TO COMBUSTIBLE MATERIALS

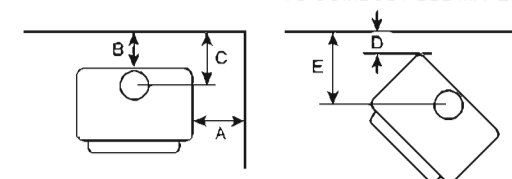

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	20"	16"
B	25"	13"
C	25 1/2"	13 1/2"
D	18"	12"
E	27 1/4"	21 1/4"

Homestead

WOOD STOVE



HOMESTEAD MODEL 8570 BROWN MAJOLICA ENAMEL + SOAPSTONE

Our Cleanest Burning Stove, Freestanding or Hearthmount



Hearthmount Homestead featured in Matte Black with hearth surround.

FINISH OPTIONS:



Matte Black



Brown Majolica Enamel

HOMESTEAD 8570 FEATURES AND BENEFITS

- **Flexible Installation** – Available as freestanding or hearthmount stove
- **Low Flue Exit** – Uniquely designed as an 'outsert' to sit on your hearth and vent up your fireplace chimney
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	1,800 sq ft
Firebox Capacity	2.0 cu ft
BTU	Up to 50,000
EPA Certified	1.9 g/hr
Efficiency	73% LHV, 68% HHV
Burn Time	Up to 8 hours
HeatLife	Up to 12 hours
Maximum Log Length	21"
Flue Exit & Diameter	Top or Rear - 6"
Ash Pan	Included
Actual Weight	360 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES


Convection Blower	90-57000
Rear Heat Shield	95-68700
Outside Air Adapter	95-53700
Hearth Surround	95-59710

CLEARANCES TO COMBUSTIBLE MATERIALS

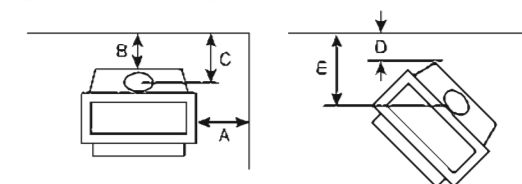


	Single-wall pipe, no rear heat shield		Double-wall pipe, with rear heat shield	
	H-M	F-S	H-M	F-S
A	23"	23"	16"	16"
B	26"	26"	7"	7"
C	N/A	28½"	N/A	9½"
D	18"	18"	12"	12"
E	N/A	27¼"	N/A	21¼"


Hearth-Mount

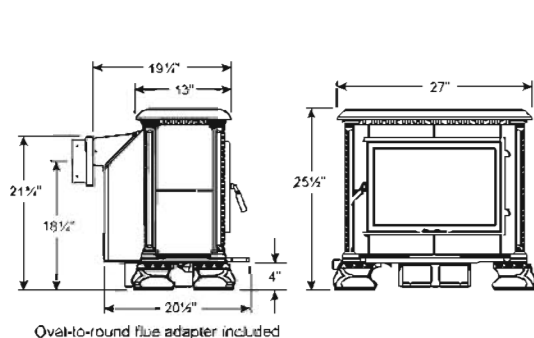


Minimum Hearth Protection US/Canada:
Thermal Protection R-value 6.6

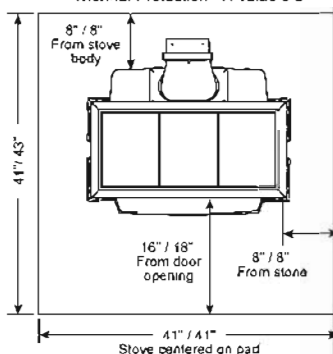

Free-Standing

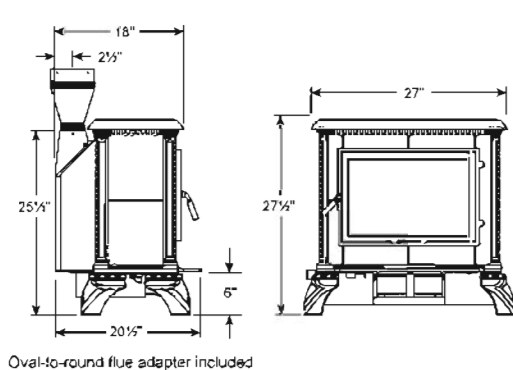

Minimum Hearth Protection US/Canada:
Thermal Protection R-value 2.5

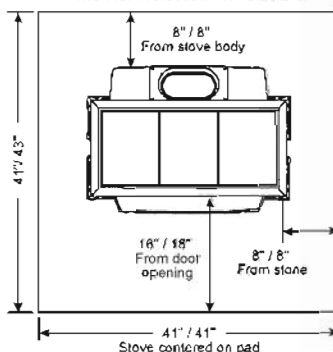

Castleton WOOD STOVE



CASTLETON MODEL 8030 BROWN MAJOLICA ENAMEL + SOAPSTONE

Classic Style with the Essentials



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Seafoam Enamel

Castleton featured in Matte Black.

CASTLETON 8030 FEATURES AND BENEFITS

- **Cast Iron Interior Impact Plates** – Protect the soapstone when loading the stove
- **Top Or Rear Flue Exit** – Flexible installation
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up


SPECIFICATIONS

Heats up to	1,500 sq ft
Firebox Capacity.....	1.9 cu ft
BTU	Up to 45,000
EPA Certified	2.7 g/hr
Efficiency	78% LHV, 72% HHV
Burn Time	Up to 8 hours
HeatLife	Up to 10 hours
Maximum Log Length.....	18"
Flue Exit & Diameter.....	Top or Rear - 6"
Actual Weight	464 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes


ACCESSORIES

Rear Heat Shield	90-68300
Convection Blower.....	90-57210
Outside Air Adapter.....	90-53300
Spark Screen.....	90-69300

CLEARANCES TO COMBUSTIBLE MATERIALS

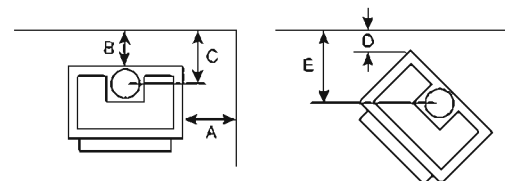

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	20"	15"
B	18"	6"
C	23"	11"
D	10"	10"
E	23"	23"

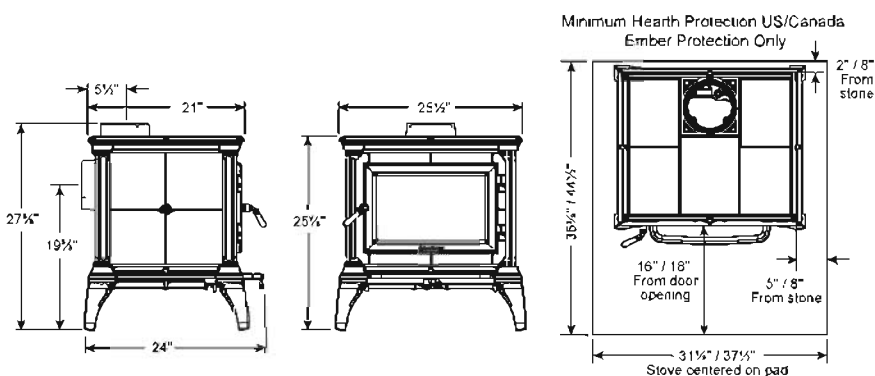

Tribute WOOD STOVE



TRIBUTE MODEL 8040 SEAFOAM ENAMEL + SOAPSTONE

Beautiful Soapstone, Scaled to Warm a More Moderate Space



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Seafoam Majolica Enamel



Tribute featured with Brown Majolica Enamel finish.

TRIBUTE 8040 FEATURES AND BENEFITS

- **Compact Size** – Adapts to smaller spaces
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up


SPECIFICATIONS

Heats up to	1,300 sq ft
Firebox Capacity	1.2 cu ft
BTU	Up to 36,000
EPA Certified	3.0 g/hr
Efficiency	80% LHV, 74% HHV
Burn Time	Up to 5 hours
HeatLife	Up to 7 hours
Maximum Log Length	16"
Flue Exit & Diameter	6" top exit
Actual Weight	318 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES


Convection Blower	90-57210
Rear Heat Shield	90-68400
Spark Screen	90-69400
Outside Air Adapter	90-53400

CLEARANCES TO COMBUSTIBLE MATERIALS

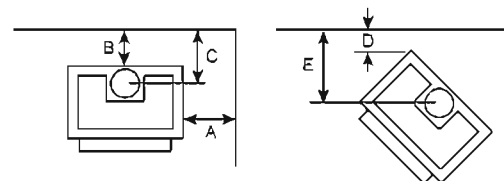

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	16½"	16½"
B	19"	8"
C	24"	13"
D	17"	7"
E	28½"	18½"

Minimum Hearth Protection US/Canada:
Thermal Protection. R-value 0.6

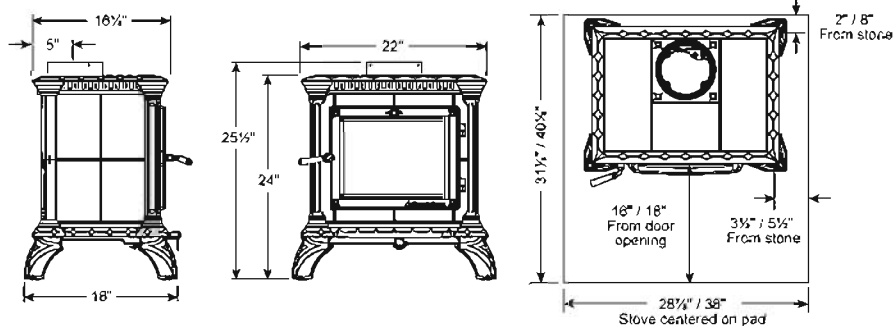

Manchester WOOD STOVE



MANCHESTER MODEL 8361 BARN RED ENAMEL WITH LEFT SIDE DOOR

For Efficient, Toasty, Whole-Home Heat



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Barn Red Enamel



Decorative cast rear heat shield

Side load door



MANCHESTER 8361 FEATURES AND BENEFITS

- **Soapstone-Lined Interior** – Extended HeatLife
- **Right Or Left Side Door** – Flexible Installation
- **Oven-Style Side Door** – Helps keep ashes in firebox
- **Convection Air Channel With Heat Exchanger** – Pulls more heat out of the stove and into your home
- **Decorative Cast Rear Heat Shield** – Finished look from any angle
- **Top Or Rear Flue Exit** – Flexible Installation
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	2,400 sq ft
Firebox Capacity	2.9 cu ft
BTU	Up to 78,000
EPA Certified	2.1 g/hr
Efficiency	77% LHV, 71% HHV
Burn Time	Up to 10 hours
HeatLife	Up to 13 hours
Maximum Log Length	24"
Flue Exit & Diameter	Top or Rear - 6"
Ash Pan	Included
Side Load Door	Choose Left or Right
Rear Heat Shield	Included
Actual Weight	515 lbs
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES

Convection Blower	93-57600
Close Clearance Heat Shield	93-68600
Outside Air Adapter	93-53500
Spark Screen	93-69600

CLEARANCES TO COMBUSTIBLE MATERIALS

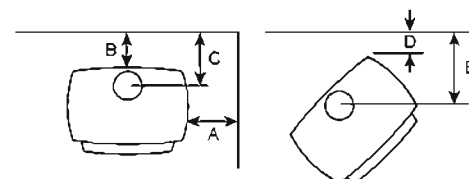


Single-wall pipe, no
close-clearance heat
shield

Double-wall pipe, with
close-clearance heat shield

	Single-wall pipe, no close-clearance heat shield	Double-wall pipe, with close-clearance heat shield
A	18"	16" *
B	20"	9"
C	26"	14"
D	11"	9" *
E	23 1/4"	21 1/4" *

* Non-door side -or- locked side door

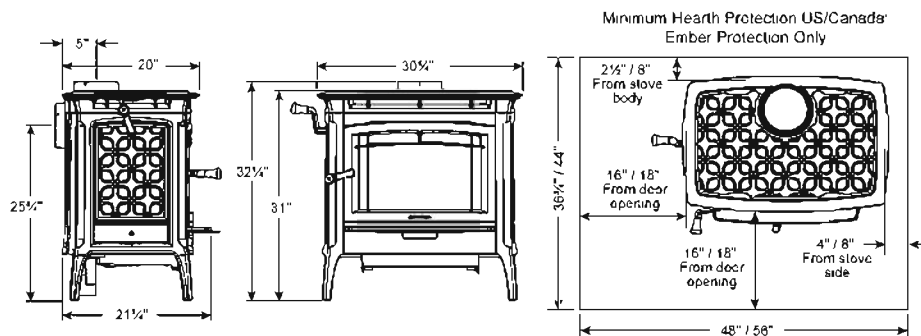

Shelburne

WOOD STOVE



SHELburne MODEL 8371 MATTE BLACK

The Traditional Beauty of Cast Iron in Your Home



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Basil Majolica Enamel



Shelburne featured with Basil Majolica Enamel finish

SHELBURNE 8371 FEATURES AND BENEFITS

- **Soapstone-Lined Firebox** – Soapstone interior panels hold heat to extend the HeatLife of the stove
- **Reversible Top Or Rear Flue** – Flexible installation (freestanding or hearthmount)
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	1,800 sq ft
Firebox Capacity	2.0 cu ft
BTU	Up to 50,000
EPA Certified	2.1 g/hr
Efficiency	76% LHV, 70% HHV
Burn Time	Up to 8 hours
HeatLife	Up to 10 hours
Maximum Log Length	20"
Flue Exit & Diameter	Top or Rear - 6"
Ash Pan	Included
Actual Weight	400 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes


ACCESSORIES

Convection Blower	90-57000
Rear Heat Shield	93-68700
Outside Air Adapter	93-53700

CLEARANCES TO COMBUSTIBLE MATERIALS

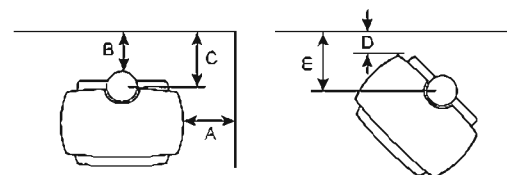

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	18"	21"
B	24"	12"
C	27½"	15½"
D	13"	6"
E	20"	13"

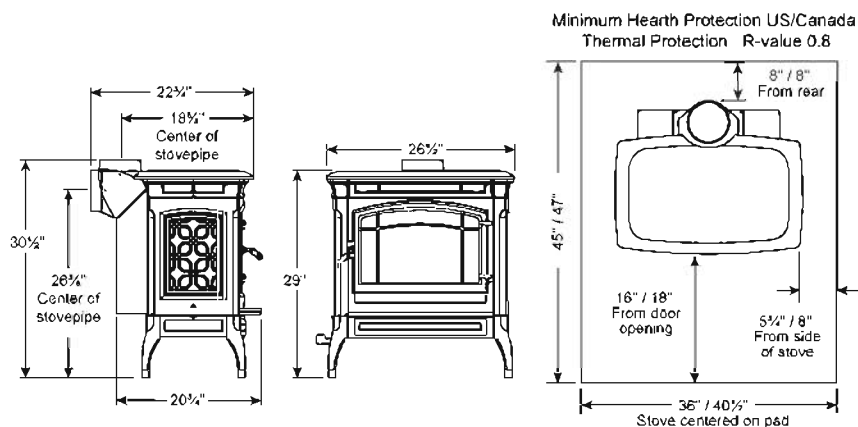

Craftsbury

WOOD STOVE



CRAFTSBURY MODEL 8391 BASIL ENAMEL


Classic and Compact with the Benefit of Soapstone Interior Panels



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Basil Enamel



Craftsbury featured with Brown Majolica Enamel finish.

CRAFTSBURY 8391 FEATURES AND BENEFITS

- **Soapstone-Lined Firebox** – Soapstone interior panels hold heat to extend the HeatLife of the stove
- **Reversible Top Or Rear Flue** – Flexible installation (freestanding or hearth-mount)
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	1,300 sq ft
Firebox Capacity	1.5 cu ft
BTU	Up to 40,000
EPA Certified	3.8 g/hr
Efficiency	80% LHV, 74% HHV
Burn Time	Up to 6 hours
HeatLife	Up to 7 hours
Maximum Log Length	17½"
Flue Diameter	Top or Rear - 6"
Ash Pan	Included
Actual Weight	285 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES


Convection Blower	90-57000
Rear Heatshield	93-68900
Outside Air Adapter	90-53210
Spark Screen	93-69900

CLEARANCES TO COMBUSTIBLE MATERIALS

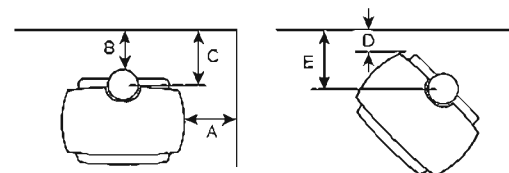


	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	14"	14"
B	18"	6"
C	21"	9"
D	17"	10"
E	22½"	15"

Minimum Hearth Protection US/Canada
Ember Protection Only

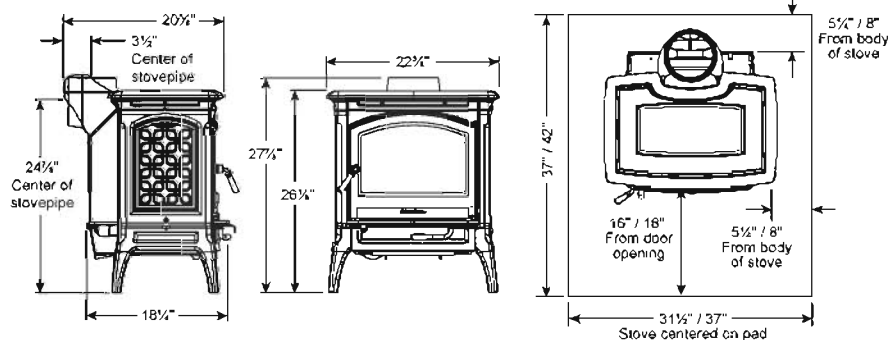

Clydesdale

WOOD FIREPLACE INSERT

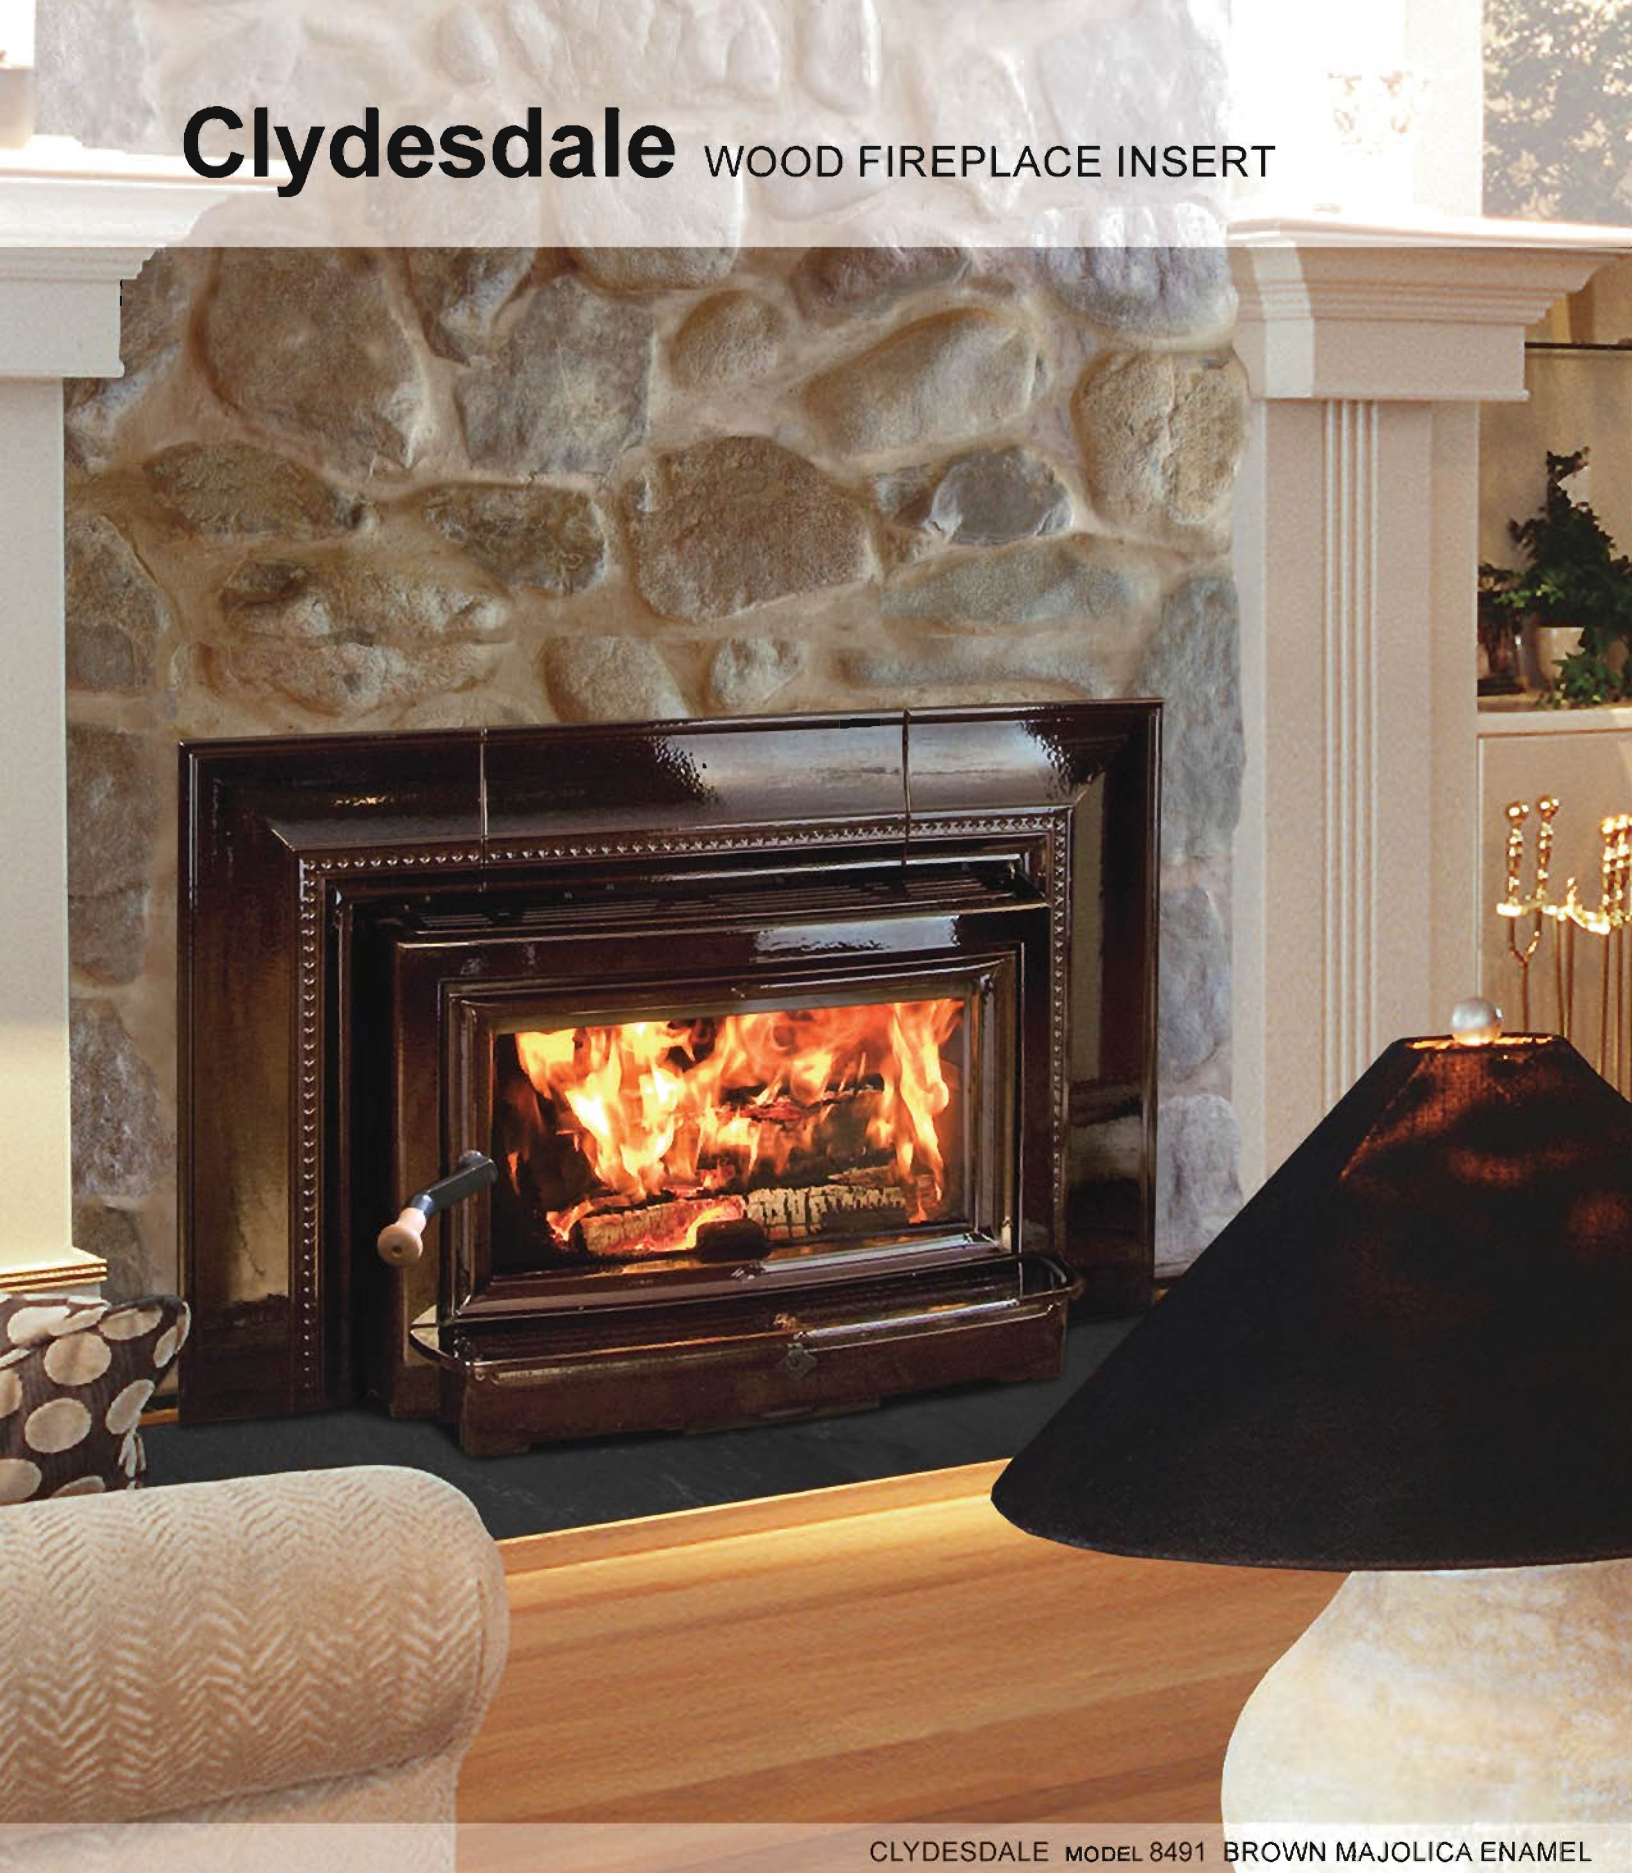

CLYDESDALE MODEL 8491 BROWN MAJOLICA ENAMEL

Transform Your Fireplace into a Comfort Solution



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel

Clydesdale featured in Matte Black with surround base caps.



CLYDESDALE 8491 FEATURES AND BENEFITS

- **Soapstone-Lined Firebox** – Extended HeatLife
- **Large Front Door** – Easy loading and great view of the fire
- **Cast Iron Firebox** – Unequalled durability and maximum heat output
- **Smooth Firebox Floor** – User friendly ash removal
- **Telescoping Design** – Depth of the insert can be adjusted to the depth of your hearth
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up

SPECIFICATIONS

Heats up to	2,000 sq ft
Firebox Capacity	2.4 cu ft
BTU	Up to 75,000
EPA Certified	3.2 g/hr
Efficiency	77% LHV, 72% HHV
Burn Time	Up to 10 hours
HeatLife	Up to 12 hours
Maximum Log Length	22"-24"
Flue Exit & Diameter	6", 2 positions
Convection Blower	Included
Actual Weight	550 lbs.







ACCESSORIES

Spark Screen	94-69900
Surround Extension	94-5990010
Surround Base Caps	94-59706X0
Mantel Shield	94-79700
Spark Screen	94-69900

CLEARANCES TO COMBUSTIBLE MATERIALS

Minimum Fireplace Opening:

Minimum Hearth Protection:
Thermal Protection: R-value 1.0

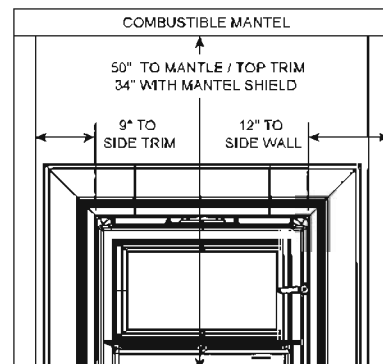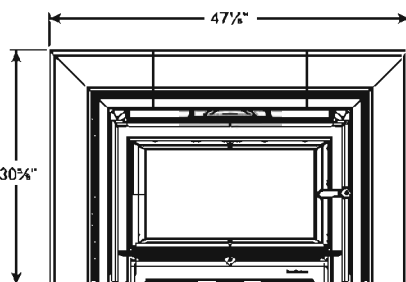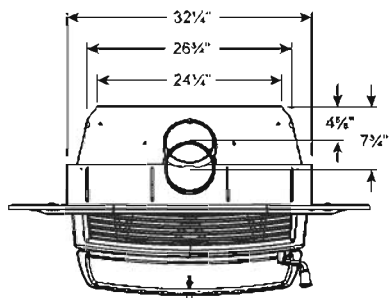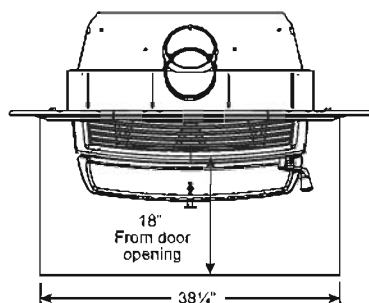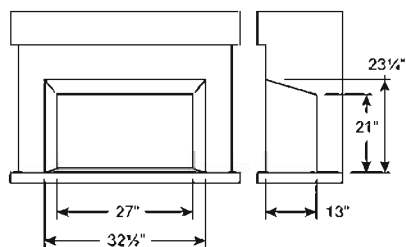

Morgan WOOD FIREPLACE INSERT



MORGAN MODEL 8470 MATTE BLACK

Efficient Heat Straight From Your Fireplace



FINISH OPTIONS:



Matte Black



MORGAN 8470

FEATURES AND BENEFITS

- **Soapstone-Lined Firebox** – Extended HeatLife
- **Large Front Door** – Easy loading and great view of the fire
- **Cast Iron Firebox** – Unequaled durability and maximum heat output
- **Smooth Firebox Floor** – User friendly ash removal
- **Telescoping Design** – Allows a flush or extended hearth projection
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up


SPECIFICATIONS

Heats up to	1,200 sq. ft.
Firebox Capacity	1.7 cu. ft.
BTU	Up to 40,000
EPA Certified	4.3 g/hr
Efficiency	78% LHV, 72% HHV
Burn Time	Up to 8 hours
HeatLife	Up to 10 hours
Maximum Log Length	18"
Flue Exit	6" - 2 positions
Convection Blower	Included
Actual Weight	349 lbs.

ACCESSORIES

Spark Screen	94-69700
Surround Extension	94-5970010
Surround Base Caps	94-5970610
Mantel Shield	94-79700
Spark Screen	94-69700

CLEARANCES TO COMBUSTIBLE MATERIALS

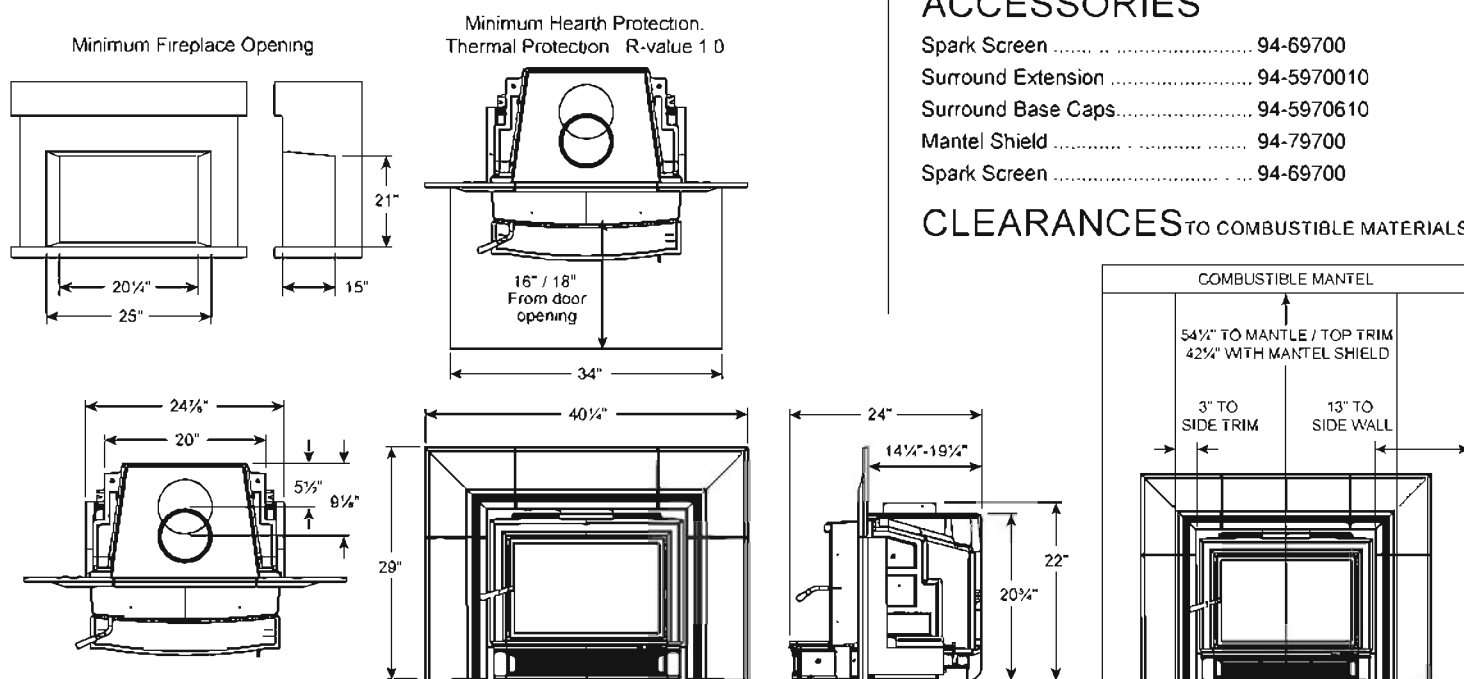

WFP-75 Montgomery WOOD FIREPLACE



WFP-75 WITH MONTGOMERY FACADE MODEL 8410 BROWN MAJOLICA ENAMEL


An Efficient and Attractive Fireplace for New Construction



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



WFP-75 8410

FEATURES AND BENEFITS

- **EPA Certified Zero Clearance Fireplace** – Clean burning, efficient
- **Stacked LedgeStone Interior Panel** – Accentuate the chiseled stone appearance of the cast iron front
- **Optional Vent Ducting** – Distribute heat to other rooms
- **Thermostat Controlled Fans** – Turn on and off automatically
- **Single Lever Stove Control** – Easy operation, consistent performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up

SPECIFICATIONS

Heats up to 2,000 sq ft
Firebox Capacity 2.5 cu ft *
BTU Up to 75,000**
EPA Certified 4.4 g/hr
Efficiency 60% LHV, 55% HHV
Maximum Log Length 20"
Flue Exit & Diameter Top - 6" (7" Optional)
Type of Chimney Refer to owner's manual
Convection Blower Included
Actual Weight 400 lbs

* Maximum firebox capacity, 1.7 cu ft behind the andron





** BTU input value shown, Output: 8,000 to 40,000 BTUs

ACCESSORIES

Spark Screen 94-69100
Gravity Convection Air Kit 94-99100
Forced Air Convection Kit 94-57100

CLEARANCES TO COMBUSTIBLE MATERIALS

REFER TO THE OWNER'S MANUAL FOR FRAMING DIMENSIONS

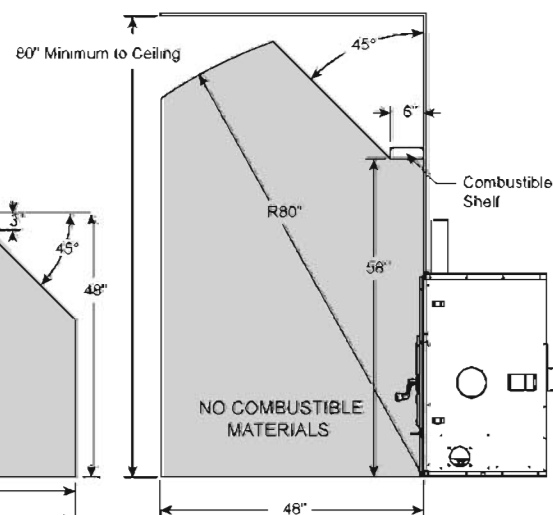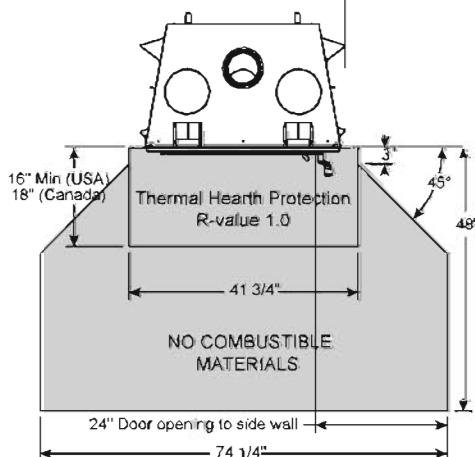

WFP-100 Montgomery WOOD FIREPLACE



WFP-100 WITH MONTGOMERY FACADE MODEL 8420 MATTE BLACK

The Clean-Burning Heart of Your Home



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel

WFP-100 8420

FEATURES AND BENEFITS

- **EPA Certified Zero Clearance Fireplace** – Clean burning, efficient
- **Stacked LedgeStone Interior Panel** – Accentuate the chiseled stone appearance of the cast iron front
- **Optional Vent Ducting** – Distribute heat to other rooms
- **Thermostat Controlled Fans** – Turn on and off automatically
- **Simple Stove Control** – Easy operation, efficient performance
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up

SPECIFICATIONS


Heats up to	2,800 sq ft
Firebox Capacity	4.28 cu ft
BTU	Up to 95,000*
EPA Certified	1.6 g/hr
Efficiency	68% LHV, 64% HHV
Maximum Log Length	25"
Flue Exit & Diameter	Top - 8"
Type of Chimney	Refer to owner's manual
Convection Blower	Included (up to 176 CFM)
Actual Weight	810 lbs. (with facade)

* Based on burning dry cordwood
Overall heat output rate: 16,610 to 43,021 BTU/hr

ACCESSORIES

Gravity Circulation Louver.....	94-99200
Forced Air Convection Kit (6").....	94-57200

CLEARANCES TO COMBUSTIBLE MATERIALS

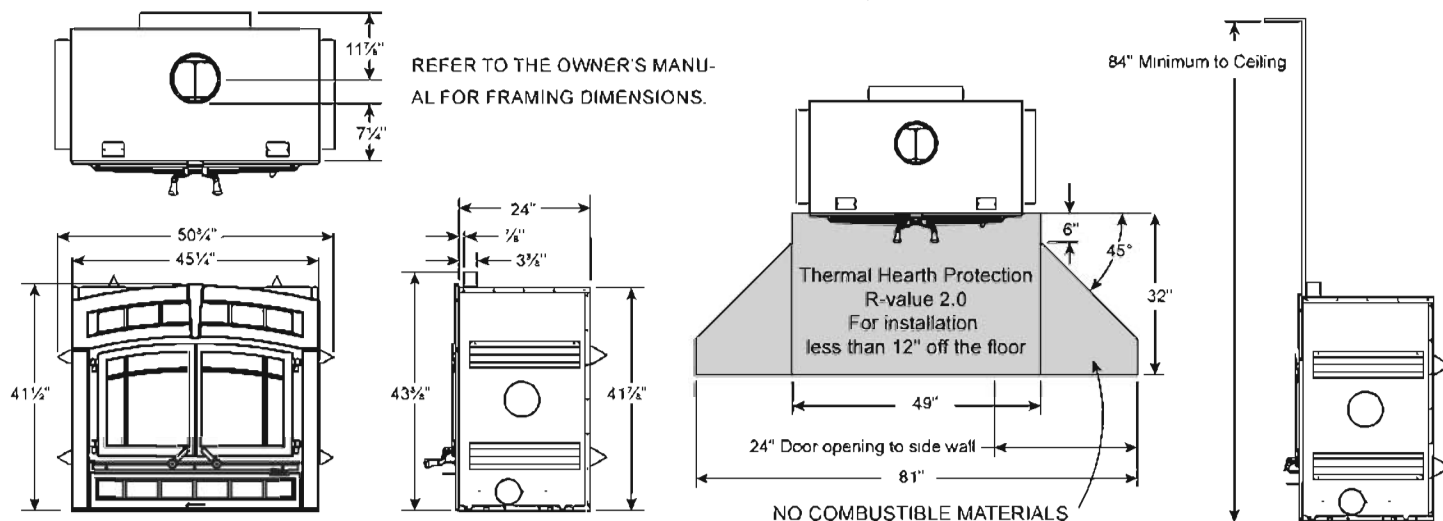



by **hase** 

The HearthStone brand was founded on the quality of our products.

That's why we partner with Hase to bring a modern European-style product to the North American market.

Hase products are among the highest quality products in the world. They are designed and manufactured exclusively in Germany, and made available to you only through HearthStone.



European Design

Hase products are designed with clean modern style. As Hase puts it:

Above all, the goal is to create stoves with a balanced and harmonious shape and form. Our stoves truly shine and make a beautiful impression in rooms with minimal furnishings, well-chosen furniture, and clean, streamlined designs.



Custom colors

The Bari wood stove offers the warmth of soapstone with a Hase signature style.

Or, you can also special order stoves and ceramic panel sets in a variety of different colors. Visit www.hase.de so see the full range of color options.

Bari WOOD FIREPLACE by hase



BARI MODEL 8170 SILVER GRAY + SOAPSTONE


Fine European Design – Amazing Spectacle of Fire



FINISH OPTIONS:



Silver Grey



Charcoal

PANEL OPTIONS:



Soapstone



Charcoal

Choose the stove color and panel set that best complements your home

Additional finish options are available by special order. Inquire with your dealer or visit www.hase.de

Bari stove featured in Black/Lava.

BARI 8170

FEATURES AND BENEFITS

- **Rotating Design Maximizes Convenience** - View flames from around the room
- **Soapstone Or Ceramic Tiles** - Store and radiate heat
- **Multiple Color Options** – Special order for personalization
- **Generous Firebox** – Burn 17" logs vertically
- **Double Steel Wall Construction** – Reduced clearances, encourages airflow, moves heat throughout home
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan** – Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	1,400 sq ft
Firebox Capacity	1.4 cu ft
BTU	Up to 35,000
EPA Certified	3.6 g/hr
Efficiency	82% LHV, 76% HHV
Burn Time	Up to 6 hours
Maximum Log Length	17"
Flue Exit & Diameter	Top - 6"
Ash Pan	Included
Rear Heat Shield	Integral
Rotation	180°
Actual Weight	475 lbs
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES


Outside Air Adaptor	91-53700
Mobile Home Anchor	91-99400

CLEARANCES TO COMBUSTIBLE MATERIALS

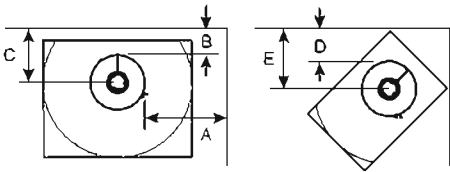

	Single-wall pipe	Double-wall pipe
A	38"	38"
B	17" *	17" *
C	26½" *	26½" *
D	12" **	12" **
E	21½" **	21½" **

* Stove free to rotate, ** Stove locked in position

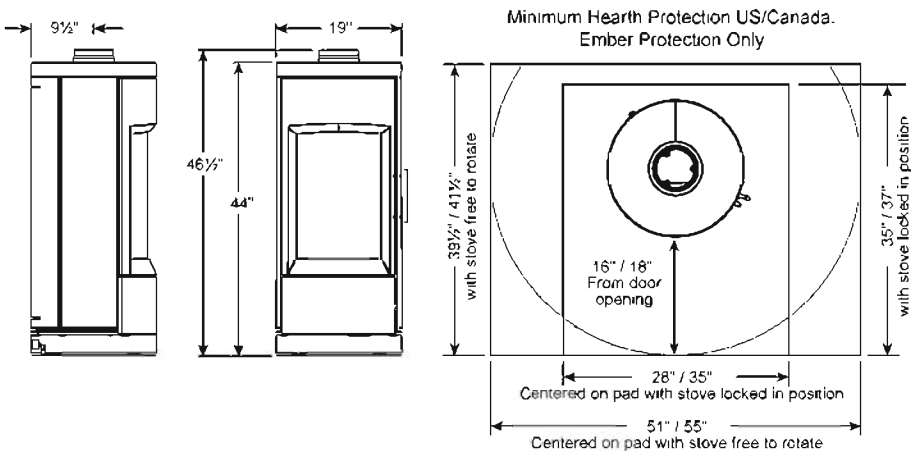

Tula WOOD FIREPLACE by hase




TULA MODEL 8191 CHARCOAL + SOAPSTONE

The Perfect Balance of Form and Function



Tula in Charcoal + Soapstone,
with heat storage kit installed

Tula with the optional Charcoal
steel panel set

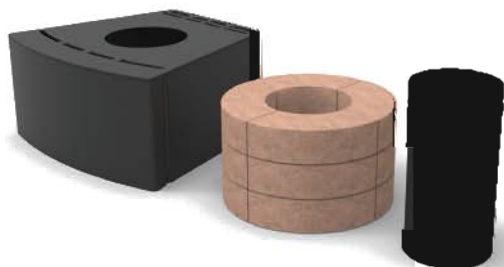

The heat storage kit includes the stove extension,
heat storage bricks and pipe extension

FINISH OPTIONS:



Charcoal

PANEL OPTIONS:



Soapstone
(Ships with the stove)



Charcoal
(Optional accessory)

TULA 8191

FEATURES AND BENEFITS

- **Ultra High Efficiency** – Reduces heating costs
- **Generous Firebox** – Burn 17" logs vertically
- **Double Steel Wall Construction** – Reduced clearances, encourages airflow, moves heat throughout home
- **Secondary Burn Combustion System** – Clean burning, efficient, reduces creosote build-up
- **Ash Pan**– Easy to clean, easily accessible


SPECIFICATIONS

Heats up to	1,400 sq ft
Firebox Capacity	1.4 cu ft
BTU	Up to 35,000
EPA Certified	2.6 g/hr
Efficiency	78% LHV, 72% HHV
Burn Time	Up to 6 hours
Maximum Log Length	17"
Flue Exit & Diameter	Top - 6"
Ash Pan	Included
Rear Heat Shield	Integral
Outside Air Adaptor	Optional
Actual Weight	291 lbs
Alcove Certified	Yes
Mobile Home Certified	Yes



ACCESSORIES

Outside Air Adaptor	91-53900
Mobile Home Anchor	91-99900
Heat Storage Kit	91-98900
Steel Panel Set	91-8291012

CLEARANCES TO COMBUSTIBLE MATERIALS

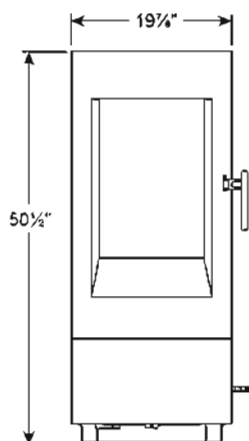

Minimum Hearth Protection US/Canada Ember Protection Only

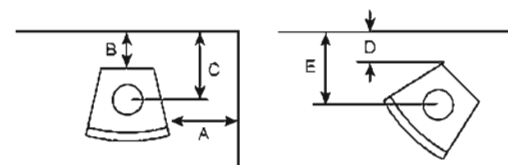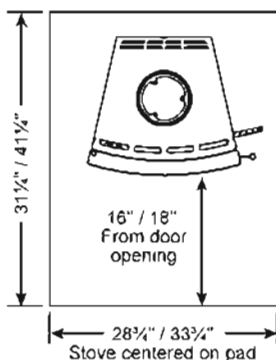

	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
A	15"	15"
B	12"	7"
C	20 1/2"	14 1/2"
D	11"	11"
E	20 1/2"	20 1/2"

Eclipse DV GAS STOVE by hase






ECLIPSE MODEL 8901 SATIN BLACK + SOAPSTONE

Modern Freestanding Gas Stove.



Access the valve by removing the soapstone panel

Thermostatic, programmable remote control

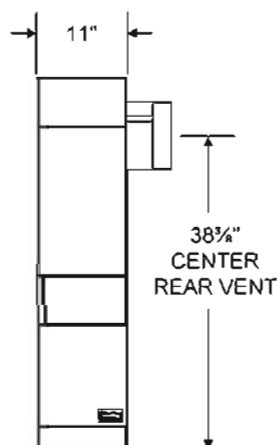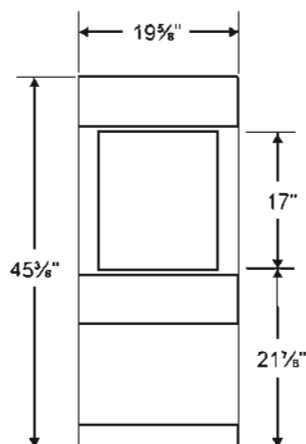

ECLIPSE MODEL 8906 FEATURES AND BENEFITS VENTLESS STOVE

- **Reflective black enamel interior** - Magnifies the glow and depth of the fire
- **CPSC certified child-safe glass barrier** - Ensures safety within your home
- **Remote Control** - Offers flame adjustment, thermostatic mode, programmable timer
- **Glass media** - Black reflective glass included standard with all fireplaces, 6 additional media options available for purchase
- **On-demand ignition system** - Conserves energy in warm weather, provides reliability in cold weather
- **Secure battery power** - No 110V power needed, ever.
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to	700 sq ft
Steady State Efficiency	99% NG / LP
P.4.1.09 Fireplace Efficiency	N/A
Burn Rate Range NG	12,500-16,000 BTUs/hr
Burn Rate Range LP	11,500-18,000 BTUs/hr
Fuel	Order as NG or LP
LP Conversion	Not available
Venting	N/A
Ignition System	Maxitrol GV60
Linear Burner	Black glass media included
Remote Control	Included
CPSC Safety Screens	Included
Weight	165 lbs.

ACCESSORIES

Wall Touch Pad	7000-260
A/C Adaptor	7000-070
6 Additional glass media colors available: Jasmine, Teal, Sepia, Emerald, Viridian, Lapis	

CLEARANCES

Clearance to combustible surfaces	
Rear	0
Side	6" (152mm)
Corner	6" (152mm)
Floor Protection: Non-combustible surface or wood floor	

ECLIPSE MODEL 8901 FEATURES AND BENEFITS DIRECT VENT STOVE

- **Reflective black enamel interior** - Magnifies the glow and depth of the fire
- **CPSC certified child-safe glass barrier** - Ensures safety within your home
- **Remote Control** - Offers flame adjustment, thermostatic mode, programmable timer
- **Glass media** - Black reflective glass included standard with all fireplaces, 6 additional media options available for purchase
- **On-demand ignition system** - Conserves energy in warm weather, provides reliability in cold weather
- **Secure battery power** - No 110V power needed, ever.
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to	700 sq ft
Steady State Efficiency	79.0% NG / 77.8% LP
P.4.1.09 Fireplace Efficiency	56.2% NG / 47.8% LP
Burn Rate Range NG	7,500-13,500 BTUs/hr
Burn Rate Range LP	7,500-13,500 BTUs/hr
Fuel	Order as NG or LP
LP Conversion	Not available
Venting	Rear, 4" x 6-5/8" DV
Ignition System	Maxitrol GV60
Linear Burner	Black glass media included
Remote Control	Included
CPSC Safety Screens	Included
Weight	165 lbs

ACCESSORIES

Wall Touch Pad	7000-260
A/C Adaptor	7000-070
6 Additional glass media colors available: Jasmine, Teal, Sepia, Emerald, Viridian, Lapis	

CLEARANCES

Clearance to combustible surfaces	
Rear	0
Side	6" (152mm)
Corner	6" (152mm)
Floor Protection: Non-combustible surface or wood floor	





Wood Fire **Cooking**

Old world meets new world.

Wood fire cooking isn't just for hunting cabins and camping. The Deva wood fired cooks stove is designed to regulate the temperature of its spacious oven for baking breads, roasts, casseroles and more. The glass cook top is heated by the wood firebox below.

The Deva is a full service range powered by wood.

Deva WOOD COOK STOVE



DEVA MODEL 8220 BLACK ENAMEL

Classic Good Looks, Contemporary Performance



FINISH OPTIONS:



Black Enamel




DEVA 8220 FEATURES AND BENEFITS


- **Ample Oven** (17.25" W x 15"H x 17" D) – Large enough to cook a 20 pound turkey
- **Large Window** – Easy to monitor cooking
- **Vitreoceramic Cook Top** – Easy to clean, efficient heat transfer
- **Oven Temperature Control** – Simple operation, easy to control, consistent heat for baking
- **Centrally Located Thermometer** – Easy visibility, precise temperature control
- **Single Lever Stove Control** – Easy operation, consistent performance

SPECIFICATIONS

Firebox Capacity	1.6 cu ft
BTU	Up to 46,000
EPA Rating	Exempt
Maximum Log Length	17"
Flue Exit & Diameter	Top or Rear - 6"
Oven Capacity	2.5 cu ft
Ash Pan	Included
Actual Weight	484 lbs

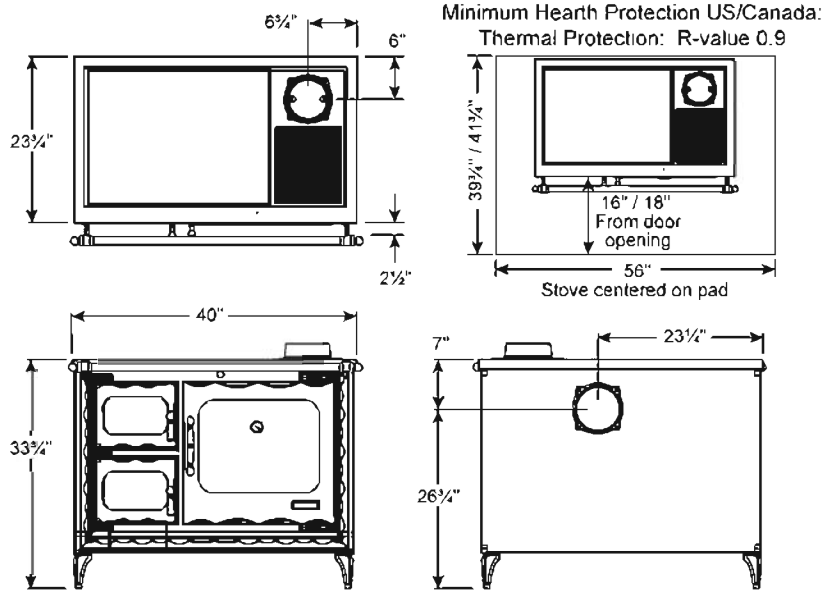

CLEARANCES TO COMBUSTIBLE MATERIALS



	Single wall connector		Double wall connector	
	Top Exit	Rear Exit	Top Exit	Rear Exit
A	10"	4"	4"	4"
B	10"	4"	4"	4"
C	16"	16"	14"	16"
D	21 1/2"	N/A	19 1/2"	N/A

The Convenience of Gas

Enjoy the warmth and the flickering ambiance of a burning fire that lights with the push of a button. Simply adjust the fire using the remote control to keep your home cozy and comfortable.

Gas stoves offer a convenient, on-demand comfort.



A Superior Product

Beautiful designs, careful craftsmanship, and reliable technology.

The quality of our products is displayed in the intricate details of the cast iron and the warm, flickering glow of the fire.

With a range of models and colors to choose from, HearthStone has a freestanding gas stove that will compliment any home.




True Efficiency

Keep the heat in your home.

We all know that gas is a clean source of heat. To truly achieve efficiency, we want to keep the heat from the fire inside your home, not up the chimney.

All HearthStone gas stoves incorporate a cast iron heat exchanger. Air from your room flows through the heat exchanger to pull more heat from your stove and into your home.

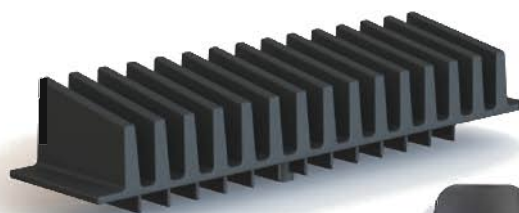

Seamless Safety

Our protective screens are seamlessly integrated into each stove. They complete the design of the stove and disappear when the fire is burning.

...by far the best safety solution on the market.



Waitsfield DX DV GAS STOVE



WAITSFIELD DX MODEL 8770 BROWN MAJOLICA ENAMEL

Panoramic Three-Sided Viewing Plus Efficient Performance



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Basil Enamel




Barn Red Enamel



WAITSFIELD DX MODEL 8770

FEATURES AND BENEFITS

- **3-sided viewing** - Provides warmth and ambiance throughout the room
- **Reflective glass interior** - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers** - Ensures safety within your home
- **Remote Control** - Offers flame adjustment, blower speed adjustment, thermostatic mode, program-mable timer
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Integrated 110 CFM convection blower** - Circulates warm air quietly
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **2-Stage burner** - Offers a wide range of heat output
- **Efficient on-demand pilot** - Conserves energy in warm weather, provides reliability in cold weather
- **Secure battery power** - Operates the stove during a power outage (Requires 110V for blower)
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

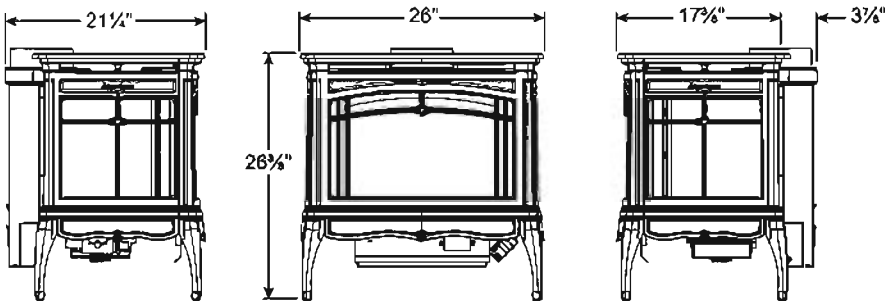

CLEARANCES

- Rear 2" (51mm)
Side 16" (407mm)
Corner 11" (280mm)

Floor Protection: Non-combustible surface or wood floor

Refer to Owner's Manual for exact specifications prior to installation

SPECIFICATIONS

Heats up to	1,800 sq ft
Steady State Efficiency	77.4%
P.4.1.09 Fireplace Efficiency	70.0%
Burn Rate Range NG	18,000-37,000 BTUs/hr
Burn Rate Range LP	16,000-37,000 BTUs/hr
Venting	Top, 4" x 6-5/8" DV
Ignition System	Maxitrol GV60
Burner	2-Stage Ceramic Burner
Convection Blower	Included
Remote Control	Included
Safety Barrier Screens	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight	200 lbs.

ACCESSORIES

Wall Touch Pad	7000-260
----------------------	----------

Bristol DX DV GAS STOVE



BRISTOL DX MODEL 8763 BASIL MAJOLICA ENAMEL

Versatile Size With a View of the Fire on Three Sides.



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Basil Enamel



BRISTOL DX MODEL 8763 FEATURES AND BENEFITS


- **3-sided viewing** - Provides warmth and ambiance throughout the room
- **Child-safe certified glass barriers** - Ensures safety within your home
- **Remote Control** - Offers flame adjustment, blower speed adjustment, thermostatic mode, programmable timer
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Integrated 110 CFM convection blower** - Circulates warm air quietly
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **Efficient on-demand pilot** - Conserves energy in warm weather, provides reliability in cold weather
- **Secure battery power** - Operates the stove during a power outage (Requires 110V for blower)
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to	1,400 sq ft
Steady State Efficiency	73.2%
P4.1.09 Fireplace Efficiency	68.2%
Burn Rate Range NG	18,000-26,000 BTUs/hr
Burn Rate Range LP	16,000-26,000 BTUs/hr
Venting	Top, 4" x 6-5/8" DV
Ignition System	Maxitrol GV60
Burner	Ceramic Burner
Convection Blower	Included
Remote Control	Included
Safety Barrier Screens	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight	170 lbs

ACCESSORIES

Wall Touch Pad	7000-260
----------------	----------

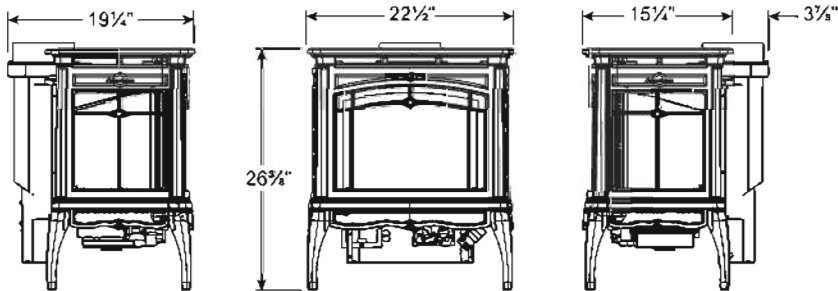

CLEARANCES

Rear	.2" (51mm)
Side	10" (254mm)
Corner	.4" (102mm)

Floor Protection: Non-combustible surface or wood floor

Refer to Owner's Manual for exact specifications prior to installation

Champlain DV GAS STOVE



CHAMPLAIN MODEL 8302 BROWN MAJOLICA ENAMEL

A Perfect Zone Heating Solution




FINISH OPTIONS:



Solid Black



Brown Majolica Enamel



*Shown with 45° elbow venting
Dimensions may vary depending on
venting manufacturer

CLEARANCES

Rear.....	3" (77mm)
Side.....	2" (51mm)
Side, snorkel termination.....	4" (102mm)
Floor Protection.....	
Non-combustible surface or wood floor	

CHAMPLAIN MODEL 8303 STANDING PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Thermostatic remote control (optional)** - On / Off thermostatic mode
- **Ceramic logs** - Simulates a realistic wood fire
- **Convenient standing pilot** - Quick and reliable starts all year round
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/ off, manual rheostat control
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to.....	1,800 sq ft
Steady State Efficiency.....	74.6%
P.4.1.09 Fireplace Efficiency.....	67.9%
Burn Rate Range NG.....	21,000-35,000 BTUs/hr
Burn Rate Range LP.....	21,000-35,000 BTUs/hr
Venting.....	.45°, 4" x 6-5/8" DV
Ignition System.....	SIT Nova
Burner.....	Pan Burner
Thermostatic Remote Control.....	Optional
Safety Barrier Screens.....	Included
LP Conversion Kit.....	Included
Mobile Home Certified.....	Yes
Weight.....	220 lbs.

ACCESSORIES

Convection Blower.....	93-57020
Thermostatic Remote Control Kit.....	90-56914

CHAMPLAIN MODEL 8302 ON-DEMAND PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Remote Control** - Offers flame adjustment, thermostatic mode, programmable timer
- **Ceramic logs** - Simulates a realistic wood fire
- **Efficient on-demand pilot** - Conserves energy in warm weather, provides reliability in cold weather
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/ off, manual rheostat control
- **Secure battery power** - Operates the stove during a power outage (Requires 110V for optional blower)
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to.....	1,800 sq ft
Steady State Efficiency.....	74.6%
P.4.1.09 Fireplace Efficiency.....	67.9%
Burn Rate Range NG.....	21,000-35,000 BTUs/hr
Burn Rate Range LP.....	23,000-35,000 BTUs/hr
Venting.....	.45°, 4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Burner.....	Pan Burner
Remote Control.....	Included
Safety Barrier Screens.....	Included
LP Conversion Kit.....	Included
Mobile Home Certified.....	Yes
Weight.....	220 lbs.

ACCESSORIES

Convection Blower.....	93-57020
Wall Touch Pad.....	7000-260
A/C Adaptor.....	7000-070

Refer to Owner's Manual for exact specifications prior to installation

Stowe DV GAS STOVE



STOWE MODEL 8323 OYSTER ENAMEL

A Beautiful Room Heater

FINISH OPTIONS:






Mattie Black



Brown Majolica Enamel



Oyster Enamel



*Shown with 45° elbow venting.
Dimensions may vary depending on
venting manufacturer.

CLEARANCES

Rear	3" (77mm)
Side	4" (102mm)* *6" with side walls deeper than 18"
Corner	4" (102mm)
Floor Protection	
Non-combustible surface or wood floor	

STOWE MODEL 8324 STANDING PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron refractory** - Features a traditional brick pattern
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Thermostatic remote control (optional)** - On / Off thermostatic mode
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **Convenient standing pilot** - Quick and reliable starts all year round
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/off, manual rheostat control
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to	1,200 sq ft
Steady State Efficiency	80.1%
P4.1 09 Fireplace Efficiency	75.7%
Burn Rate Range NG	15,000-22,400 BTUs/hr
Burn Rate Range LP	15,000-22,400 BTUs/hr
Venting	45°, 4" x 6-5/8" DV
Ignition System	SIT Nova
Burner	Ceramic Burner
Thermostatic Remote Control	Optional
Safety Barrier Screens	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight	155 lbs.

ACCESSORIES

Convection Blower	93-57230
Thermostatic Remote Control Kit	90-56914

STOWE MODEL 8323 ON-DEMAND PILOT FEATURES AND BENEFITS

- **Child-safe certified glass barriers** - Ensures safety within your home
- **Cast iron refractory** - Features a traditional brick pattern
- **Cast iron heat exchanger** - Maximizes heat output and efficiency
- **Remote Control** - Offers flame adjustment, thermostatic mode, programmable timer
- **Ceramic logs and burner** - Simulates a realistic wood fire
- **Efficient on-demand pilot** - Conserves energy in warm weather, offers reliability in cold weather
- **Optional 150 CFM convection blower** - Circulates warm air quietly, temperature activated on/off, manual rheostat control
- **Secure battery power** - Operates the stove during a power outage (Requires 110V for optional blower)
- **Direct-Vent technology** - Draws combustion air from outside to reduce drafts and maintain indoor air quality

SPECIFICATIONS

Heats up to	1,200 sq ft
Steady State Efficiency	80.1%
P4.1 09 Fireplace Efficiency	75.7%
Burn Rate Range NG	13,000-22,400 BTUs/hr
Burn Rate Range LP	14,000-22,400 BTUs/hr
Venting	45°, 4" x 6-5/8" DV
Ignition System	Maxitrol GV60
Burner	Ceramic Burner
Remote Control	Included
Safety Barrier Screens	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight	155 lbs.

ACCESSORIES

Convection Blower	93-57230
Wall Touch Pad	7000-260
A/C Adaptor	7000-070

Refer to Owner's Manual for exact specifications prior to installation



Soapstone Steamer 90-99112

Recommended for all wood burning stoves, the steamer adds moisture to the air to help balance the drying effects of a wood fire. Just fill the steamer pot with water and set it on your stove.




Stove Top Thermometer 90-99120

Recommended for soapstone stoves, the stove top thermometer helps you keep your stove burning within the optimal temperature range for safe and efficient heating.



Draft Inducing Flue Collar 90-99099

Recommended for installations with poor draft, the draw collar heats up your chimney to ensure a proper draft. Fits 6" flue.



Draft Meter 90-99000

Recommended for wood stoves installations, the draft meter allows you to measure the draft in your chimney. Proper draft is necessary for clean and efficient wood burning.



Wall touch pad 7000-260

For all gas stoves, the wall touch pad and be installed on a wall to turn your stove on/off and adjust the flame height.



Stirling Stove -Top Fan
for Soapstone Wood Stoves 90-99100
for Cast Iron/Steel Wood Stoves 90-99101

Truly a piece of precise mechanical art.
The Stove Top Stirling-Cycle Fan only requires
heat to work. Stirling engines operate quietly and do
not require any electricity.



Glass Hearth Pad, Circular 91-84800

Tempered glass hearth pad provides stylish ember
protection.

Diameter: 35½"



Glass Hearth Pad, D-Shaped 91-84750

Tempered glass hearth pad provides stylish ember
protection.

33½" x 43½"



Glass Hearth Pad, Square 91-84400

Tempered glass hearth pad provides stylish ember
protection.

39½" x 39½"



Glass Hearth Pad, Semi-Circular..... 91-84700

Tempered glass hearth pad provides stylish ember
protection.

55" x 43¼"

Specifications: Wood

	EQUINOX		MANSFIELD	HERITAGE	PHOENIX	HOMESTEAD
SPECIFICATIONS						
Firebox capacity (1)	4.0 cf		3.2 cf	2.5 cf	2.2 cf	2.0 cf
Maximum log length	25"		21"	21"	21"	21"
Flue exit & diameter	top or rear – 8"		top – 6"	top or rear – 6"	45° – 6"	top or rear – 6"
Ash pan	included		included	optional	included	included
Convection Blower	optional		optional	optional	N/A	optional
Mobile-home certified	yes		yes	yes	yes	yes
Alcove certified (2)	yes		yes	yes	yes	yes
Actual weight (lbs)	689		550	550	425	360
Shipping weight (lbs)	774		575	575	470	440
PERFORMANCE						
Emissions	3.1 g/hr		2.8 g/hr	2.0 g/hr	2.5 g/hr	1.9 g/hr
BTUs (3)	120,000		80,000	60,000	55,000	50,000
Efficiency LHV (4)	78%		72%	75%	75%	73%
Efficiency HHV (4)	72%		67%	70%	70%	68%
Heating capacity up to (5)	3,500 sq. ft.		2,500 sq. ft	2,000 sq. ft.	2,000 sq. ft.	1,800 sq. ft.
Burn time up to	12 hours		10 hours	8 hours	8 hours	8 hours
HeatLife™ up to (6)	16 hours		14 hours	12 hours	12 hours	12 hours
CLEARANCES (7)						
Side of stove to side wall	S	21" *	18"	17" *	20"	23"
	D	19" *	18"	15" *	16"	16"
Back of stove to back wall	S	21"	19"	16"	25"	26"
	D	6"	8"	7"	13"	7"
Corner of stove to side wall	S	15" *	14"	12" *	18"	18"
	D	13½" *	14"	11" *	12"	12"
Minimum hearth pad size US inches (9)	48" W x 41½" D		34" W x 40" D	47" W x 37 ½" D	42" W x 42" D	41" W x 41" D
Minimum hearth pad size Canada inches (9)	56" W x 48" D		40½" W x 48" D	52½" W x 42" D	42" W x 44" D	41" W x 43" D
Minimum Hearth Protection	R-value 1.0		Ember Protection	Ember Protection	R-value 1.0	Hearthmount 6.6
						Freestanding 2.5

S Single-wall pipe, no heat shield **D** Double-wall pipe, w/ rear heat shield

* Applies to the side/corner opposite the side load door. If the side door lock kit is installed, side/corner clearance applies to both sides/rear corners

	CASTLETON		TRIBUTE	MANCHESTER	SHELBURNE	CRAFTSBURY
SPECIFICATIONS						
Firebox capacity (1)	1.9 cf		1.2 cf	2.9 cf	2.0 cf	1.5 cf
Maximum log length	18"		16"	24"	20"	17½"
Flue exit & diameter	top or rear – 6"		top – 6"	top or rear – 6"	top or rear – 6"	top or rear – 6"
Ash pan	no		no	included	included	included
Convection Blower	optional		optional	optional	optional	optional
Mobile-home certified	yes		yes	yes	yes	yes
Alcove certified (2)	yes		yes	yes	yes	yes
Actual weight (lbs)	464		318	515	400	285
Shipping weight (lbs)	500		358	550	425	315
PERFORMANCE						
Emissions	2.7 g/hr		3.0 g/hr	2.1 g/hr	2.1 g/hr	3.8 g/hr
BTUs (3)	45,000		36,000	78,000	50,000	40,000
Efficiency LHV (4)	78%		80%	77%	76%	80%
Efficiency HHV (4)	72%		74%	71%	70%	74%
Heating capacity up to (5)	1,500 sq. ft.		1,300 sq. ft.	2,400 sq. ft.	1,800 sq. ft.	1,300 sq. ft.
Burn time up to	8 hours		5 hours	12 hours	8 hours	6 hours
HeatLife™ up to (6)	10 hours		7 hours	14 hours	10 hours	7 hours
CLEARANCES (7)						
Side of stove to side wall	S	20"	16 ½"	18" *	18"	14"
	D	15"	16 ½"	16" * (8)	21"	14"
Back of stove to back wall	S	18"	19"	20"	24"	18"
	D	6"	8"	9" (8)	12"	6"
Corner of stove to side wall	S	10"	17"	11" *	13"	17"
	D	10"	7"	9" *	6"	10"
Minimum hearth pad size US inches (9)	31½" W x 36½" D		28⅞" W x 31⅞" D	48" W x 36¾" D	36" W x 45" D	38½" W x 41" D
Minimum hearth pad size Canada inches (9)	37½" W x 44½" D		38" W x 40⅞" D	56" W x 44" D	40½" W x 47" D	38½" W x 43" D
Minimum Hearth Protection	Ember Protection		R-value 0.6	Ember Protection	R-value 0.8	Ember Protection

Note: Always refer to the HearthStone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product

* Applies to the side/corner opposite the side load door. If the side door lock kit is installed, side/corner clearance applies to both sides/rear corners.

Specifications: Wood


	CLYDESDALE	MORGAN	WFP-75 MONTGOMERY	WFP-100 MONTGOMERY
SPECIFICATIONS				
Firebox capacity (1)	2.4 cu. ft.	1.7 cu. ft.	2.5 cu. ft.	4.28 cu. ft.
Maximum log length	22"-24"	18"	20"	25"
Flue exit & diameter	top – 6"	top – 6"	top – 6" (7" optional)	top – 8"
Ash pan	no	no	no	no
Convection Blower	included	included	included	included
Mobile-home certified	no	no	no	no
Alcove certified (2)	no	no	no	no
Actual weight (lbs)	550	349	400	665
Shipping weight (lbs)	585	416	-	-
PERFORMANCE				
Emissions	3.2 g/hr	4.3 g/hr	4.4 g/hr	1.6 g/hr
BTUs (3)	75,000	40,000	75,000	95,000
Efficiency LHV (4)	77%	78%	60%	68%
Efficiency HHV (4)	72%	72%	55%	64%
Heating capacity up to (5)	2,000 sq. ft.	1,200 sq. ft.	2,000 sq. ft.	2,800 sq. ft.
Burn time up to	10 hours	8 hours	6 hours	6 hours
HeatLife™ up to (6)	12 hours	10 hours	N/A	N/A
CLEARANCES (7)				
Door opening to side wall	12"	13"	24"	24"
Mantel height	50"	55"	58"	N/A
Mantel height w/ shield	34"	43"	N/A	N/A
Minimum fireplace opening	23¼"H x 32½"W x 13"D	21"H x 25"W x 15"D	N/A	N/A
Minimum hearth pad size US inches (9)	38¼" W x 18" D	34" W x 16" D	41¼ W x 16" D	49 W x 32" D
Minimum hearth pad size Canada inches (9)	38¼" W x 18" D	34" W x 18" D	41¼ W x 18" D	49 W x 32" D
Minimum Hearth Protection	R-value 1.0	R-value 1.0	R-value 1.0	R-value 1.0

	DEVA
SPECIFICATIONS	
Firebox capacity (1)	1.6 cu. ft.
Maximum log length	17"
Flue exit & diameter	top or rear – 6"
Ash pan	included
Convection Blower	no
Mobile-home certified	no
Alcove certified (2)	no
Actual weight (lbs)	484
Shipping weight (lbs)	-
PERFORMANCE	
Emissions	exempt
BTUs (3)	46,000
Efficiency (4)	-
Heating capacity up to (5)	-
Burn time up to	-
HeatLife™ up to (6)	N/A
CLEARANCES (7)	
Side of stove to side wall	S 10" D 4"
Back of stove to back wall	S 16" D 14"
Corner of stove to side wall	S - D -
Minimum hearth pad size US inches (9)	56" W x 39¾" D (vertical vent)
Minimum hearth pad size Canada inches (9)	56" W x 41¾" D (vertical vent)
Minimum Hearth Protection	R-value 0.9

S Single-wall pipe, no heat shield

D Double-wall pipe, w/ rear heat shield

	BARI		TULA
SPECIFICATIONS			
Firebox capacity (1)	1.4 cu. ft		1.4 cu. ft.
Maximum log length	17"		17"
Flue exit & diameter	top – 6"		top – 6"
Ash pan	included		included
Convection Blower	no		no
Mobile-home certified	yes		yes
Alcove certified (2)	yes		yes
Actual weight (lbs)	475		291
Shipping weight (lbs)	-		-
PERFORMANCE			
Emissions	3.6 g/hr		2.6 g/hr
BTUs (3)	35,000		35,000
Efficiency LHV (4)	82%		78%
Efficiency HHV (4)	76%		72%
Heating capacity up to (5)	1,400 sq. ft.		1,400 sq. ft.
Burn time up to	6 hours		6 hours
HeatLife™ up to (6)	8 hr (soapstone only)		N/A
CLEARANCES (7)			
Side of stove to side wall	S	38"	15"
	D	38"	15"
Back of stove to back wall	S	17" *	12"
	D	17" *	7"
Corner of stove to side wall	S	12" **	11"
	D	12" **	11"
Minimum hearth pad size US inches (9)	51" W x 39½" D		28¾"W x 31¼"D
Minimum hearth pad size Canada inches (9)	55" W x 41½" D		33¾"W x 41¼"D
Minimum Hearth Protection	Ember Protection		Ember Protection

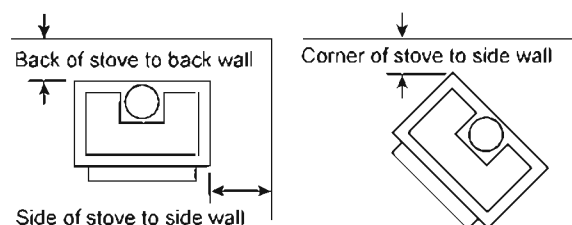

(1) The amount and weight of wood contained per cubic foot of firebox volume can vary from 15 to 36 lbs. per cubic foot depending on type of wood, moisture content, packing density, and other factors. As a constant for comparison and test purposes, we are assuming 20 lbs. of seasoned hardwood per cubic foot of firebox volume.

(2) See Owner's Manual for specific alcove clearances and alcove hearth pad requirements.

(3) Heat output will vary depending on frequency of loading, the dryness and quality of wood used, packing density, and other installation variables.

(4) HearthStone publishes both Lower Heating Value (LHV) and Higher Heating Value (HHV) efficiency numbers. LHV numbers are used by the IRS to qualify products for tax credits. HHV numbers are published by the EPA on the certified stove list. When comparing stoves, make sure you're comparing LHV to LHV or HHV to HHV.

(5) Heating capacity is an approximation dependent upon type of wood, loading configuration, floor plan, ceiling height, house construction, venting configuration, heat loss, geographic location of home, and other usage and regional variables.

(6) HeatLife™ is a trademark of HearthStone Quality Home Heating Products and is defined as the quantity of heat stored within the thermal mass of the stove. Used here, it refers not just to burn time but to total hours of usable heat from a single load of fuel.

(7) Clearances on this page are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

(8) The Manchester rear heat shield is built in; there is an optional Close Clearance heatshield which may further reduce rear clearances to 9".

(9) See Owner's Manual for specific hearth material and R-value requirements.

Note: Always refer to the HearthStone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product.

Warranty: HearthStone warrants all its wood and pellet products to the original purchaser for the lifetime of the appliance to be free from defects in material and workmanship, with certain limitations as defined in our Limited Lifetime Warranty policy. See your HearthStone dealer for complete details and a copy of our warranty policy.

S Single-wall pipe, no heat shield D Double-wall pipe, w/ rear heat shield

* Stove free to rotate, ** Stove locked in position

Specifications: Gas

	WAITSFIELD DX 8770	BRISTOL DX 8763	CHAMPLAIN 8302	STOWE 8323	
SPECIFICATIONS					
Venting	Top, 4" x 6 $\frac{1}{8}$ " DV	Top, 4" x 6 $\frac{1}{8}$ " DV	45°, 4" x 6 $\frac{1}{8}$ " DV	45°, 4" x 6 $\frac{1}{8}$ " DV	
Venting: Minimum Vertical Rise	36 in. (from top of stove)	24 in. (from top of stove)	24 in. see owner's manual	9 in.	
Ignition System	Maxitrol GV60 on-demand pilot	Maxitrol GV60 on-demand pilot	Maxitrol GV60 on-demand pilot	Maxitrol GV60 on-demand pilot	
Burner	2-Stage Ceramic	Ceramic	Stainless steel pan	Ceramic	
On-Off Switch	On-Off-Remote	On-Off-Remote	On-Off-Remote	On-Off-Remote	
Remote Control	Included	Included	Included	Included	
Convection Blower 110 CFM	Included	Included	Optional	Optional	
Safety Barrier Screens	Included	Included	Included	Included	
LP Conversion Kit *	Included	Included	Included	Included	
Mobile-home certified	Yes	Yes	Yes	Yes	
Actual weight (lbs)	200	170	220	155	
PERFORMANCE					
Heating capacity up to (3)	1,800 sq. ft.	1,400 sq. ft.	1,800 sq. ft.	1,200 sq. ft.	
Burn Rate Range NG (BTUs/hr)	18,000 to 37,000	18,000 to 26,000	21,000 to 35,000	13,000 to 22,400	
Burn Rate Range LP (BTUs/hr)	16,000 to 37,000	16,000 to 26,000	23,000 to 35,000	14,000 to 22,400	
Steady State Efficiency (2)	77.4% NG 77.4% LP	73.2% NG 73.2% LP	74.6% NG 74.6% LP	80.1% NG 80.1% LP	
P.4.1.09 Fireplace Efficiency (1)	70.0% NG / LP	68.2% NG / LP	67.9% NG / LP	75.7% NG / LP	
CLEARANCES (4)					
Minimum clearance to combustibles					
Side	16"	10"	2"	4"	
Rear	2"	2"	3"	3"	
Corner	11"	4"	2"	4"	
Hearth Protection	Non-combustible surface or wood floor	Non-combustible surface or wood floor	Non-combustible surface or wood floor	Non-combustible surface or wood floor	

Note: Always refer to the HearthStone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your stove

* All products ship ready to burn natural gas.

CHAMPLAIN 8303	STOWE 8324	ECLIPSE 8901	ECLIPSE 8906
45°, 4" x 6½" DV	45°, 4" x 6½" DV	Rear, 4" x 6½" DV	N/A
24 in. see owner's manual	9 in.	N/A	N/A
SIT Nova standing pilot	SIT Nova standing pilot	Maxitrol GV60 on-demand pilot	Maxitrol GV60 on-demand pilot
Stainless steel pan	Ceramic	Linear burner	Linear burner
yes	yes	On-Off-Remote	On-Off-Remote
no	no	Included	Included
Optional	Optional	N/A	N/A
Included	Included	Included	Included
Included	Included	Not available	Not available
Yes	Yes	Yes	Yes
220	155	165	165
1,800 sq. ft.	1,200 sq. ft.	700 sq. ft.	700 sq. ft.
21,000 to 35,000	15,000 to 22,400	7,500 to 13,500	12,500 to 16,000
21,000 to 35,000	15,000 to 22,400	7,500 to 13,500	11,000 to 18,000
74.6% NG 74.6% LP	80.1% NG 80.1% LP	79.0% NG 77.8% LP	99% NG / LP
67.9% NG / LP	75.7% NG / LP	56.2% NG 47.8% LP	N/A
2"	4"	6"	6"
3"	3"	0	0
2"	4"	6"	6"
Non-combustible surface or wood floor	Non-combustible surface or wood floor	Non-combustible surface or wood floor	Non-combustible surface or wood floor



(1) P.4.1.09 Fireplace Efficiency informs the Canadian **EnerGuide** rating. **EnerGuide** is a Government of Canada rating system that provides consumers with comparative information on the energy performance of energy-using products sold in Canada.

For more information on the **EnerGuide** Program, please visit the **EnerGuide** Web site: oee.nrcan.gc.ca/equipment

(2) Steady state efficiencies vary dependent upon installation, venting configuration, altitude, gas values, and other installation variables.

(3) Heating capacity is an approximation dependent upon floor plan, ceiling height, house construction, venting configuration, heat loss, and geographic location of home.

(4) All measurements are taken from the closest surface of the unit. Clearances in this catalog are for reference only. Refer to Owner's Manual for exact specifications prior to installation.

HearthStone Quality Home Heating Products, Inc., warrants all its gas products to the original purchaser for the lifetime of the appliance to be free from defects in material and workmanship, with certain limitations as defined in our Limited Lifetime Warranty policy. See your HearthStone dealer for complete details and a copy of our warranty policy.

HearthStone Sterling is a registered trademark of HearthStone Quality Home Heating Products, Inc.



www.hearthstonestoves.com
802.888.5235

HearthStone Quality Home Heating Products
317 Stafford Avenue
Morrisville Vermont 05661 USA



6400-50243 (07/17)



S000000479438

THE UNIVERSITY OF CHICAGO